




PRODUCT DATA 2023

UNILOCK®

Calculate

paver and
wall projects
FASTER!

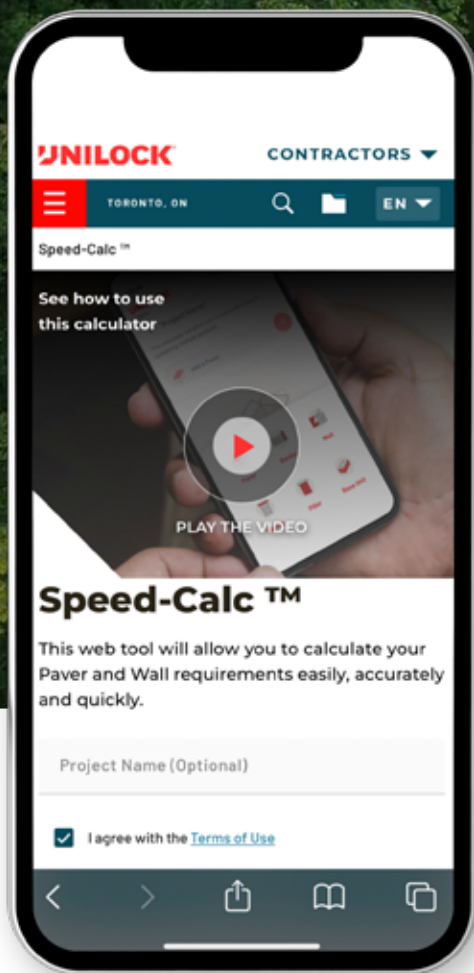

Email
directly
to your
Unilock
Dealer



Try **SPEED-CALC**™
by **UNILOCK**®



TABLE OF CONTENTS - MICHIGAN

PAVERS

Anchorlock™	4
Arcana™	5
Artline™	6
Beacon Hill™ Flagstone	7
Beacon Hill™ Smooth	8-9
Boulevard™	10
Bristol Valley®	11
Brussels Block®	12
Copthorne®	13
Courtstone®	14
Eco-Optiloc™	15
Eco-Priora™	16
Eco-Promenade®	17
Granito™	18
Hex Paver™	19
Hollandstone™	20
Holland Premier™	21
Il Campo®	22
Mattoni™	23
Natural Stone	24
Natural Stone Coping, Pillar Caps & Steps	25
Porcelain	26-27
Promenade™ Plank Paver	28-30
Richcliff®	31
Series™ 60mm	32
Skyline™	33
Soreno™ NEW	34
Thornbury™	35
Town Hall®	36
Treo® Smooth NEW	37
Tribeca Cobble™	38
Turfstone™	39
Umbriano®	40-41
Westport™	42

RETAINING WALLS

Brussels Dimensional System™	43
DuraHold®	44-45
DuraHold2®	46
Estate Wall™	47
Lineo™ Dimensional Stone	48
Pisa™	49
Pisa™ Smooth XL NEW	50
SienaEdge™	51
SienaStone™	52
SienaStone™ Smooth NEW	53-54
U-Cara® Multi-Face Wall System	55-58
U-Cara® Modular System	59
U-Cara® Wall Mount System	60-62


COPING, STEPS, PILLAR CAPS

Architectural Cap & Coping	63
Brussels Fullnose™	64
Universal Coping & Base Pad	65
Ledgestone™	66-67

DESCRIPTION OF EDGE DETAILS



APPLICATION INDEX

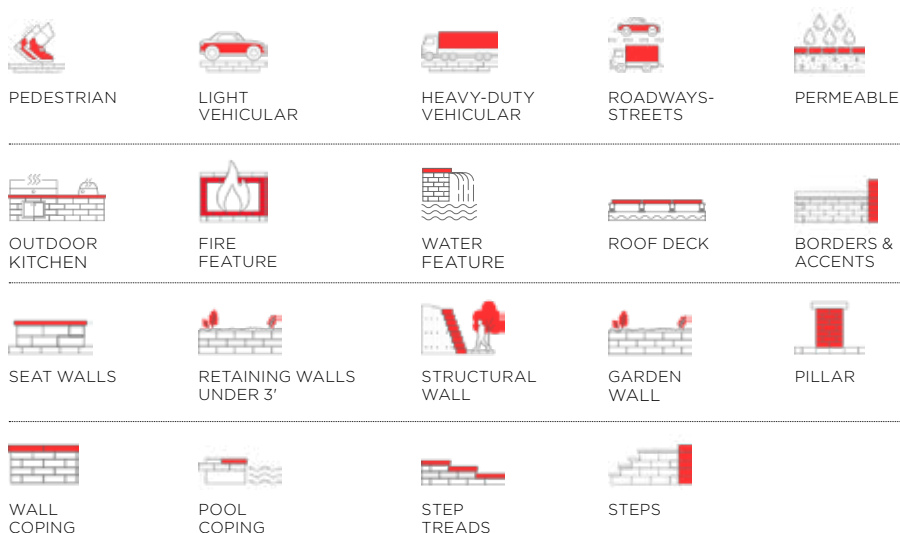

FIRE FEATURES

Sunset Fire Pit	68
Unilock Elements	70-71

ACCESSORIES

Large Equipment (Unilyft)	69
Paver Cleaners	72
Natural Stone Cleaners	72
Paver Sealers	72-73
Natural Stone Sealers	72
Adhesives	73
Sands	73-74
Edge Restraints, X&T	75
DriveGrid, Gator Grid & Gator Base	76

PRODUCT & INSTALLATION INFORMATION

Base Thickness Chart	69
Bedding Chart / Basic Depth	78
Important Notes	79
Unilock's Quality Commitment	80-81
Product Directory	82



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Smooth
 Joint Spacing - 3 mm
 Void - n/a

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix

DRIVE FRIENDLY

Can handle vehicular loads

TECHNICAL INFORMATION

Conforms to ASTM C936
 Eligible for LEED v4.1 credits

		8 7/8 X 8 7/8
	Bundle Type	SINGLE
	Plant Produced	MICHIGAN
	Thickness (mm)	80 MM

SQFT PER	Bundle	78.80
	Layer	11.26
	Section	-
	Stone	0.42

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	2.37
	Section	-
	Bundle	186.69

LBS PER	Layer	411
	Section	-
	Bundle	2,937

COLORS	Reflectance	Stock
Natural	SR .43 SRI 32	SO

LAYING PATTERN



Anchorlock A



NATURAL

Single Unit



STANDARD

225 x 225 x 80mm
 8 7/8 x 8 7/8 x 3 1/8
 186.69 units/Bundle
 .42 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
Surface Texture - Smooth
Joint Spacing - 0 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™

Factory Sealed to provide integral stain resistance

TECHNICAL INFORMATION

Conforms to ASTM C 1782
Eligible for LEED v4.1 credits



AVORIO



CORVARA



MODENA



VIVANTO

	12 X 24	18 X 24	24 X 24
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	50 MM	50 MM	50 MM

SQFT PER	Bundle	36.00	54.00	72.00
	Layer	4.00	6.00	8.00
	Section	-	-	-
	Stone	2.00	3.00	4.00

PER BUNDLE	Layers	9.00	9.00	9.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	0.49	0.50	0.50
	Section	-	-	-
	Layer	1.98	2.97	3.98
	Bundle	17.78	26.75	35.79


SAILOR LNFT PER	SqFt	0.99	0.66	0.50
	Section	-	-	-
	Layer	3.98	3.98	3.98
	Bundle	35.79	35.79	35.79

UNITS PER	SqFt	0.50	0.33	0.25
	Section	-	-	-
	Bundle	18.00	18.00	18.00


LBS PER	Layer	96	144	192
	Section	-	-	-
	Bundle	864	1,296	1,728

COLORS	Reflectance	Stock	Stock	Stock
Avorio	SR n/a SRI n/a	SO	SO	SO
Corvara	SR n/a SRI n/a	SO	SO	SO
Modena	SR n/a SRI n/a	SO	SO	SO
Vivanto	SR n/a SRI n/a	SO	SO	SO


LAYING PATTERNS



Arcana Random A




Arcana Random C



Arcana Random F



X & T Slab Spacers
Bagged Separately
(see page 80)

Single Units		12 X 24 301 x 606 x 50mm 11 ⁷ / ₈ x 23 ⁷ / ₈ x 2" 18 units/Bundle 2.00 Sq.Ft./Stone		18 X 24 453 x 606 x 50mm 17 ⁷ / ₈ x 23 ⁷ / ₈ x 2" 18 units/Bundle 3.00 Sq.Ft./Stone		24 X 24 606 x 606 x 50mm 23 ⁷ / ₈ x 23 ⁷ / ₈ x 2" 18 units/Bundle 4.00 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
Surface Texture - Smooth &
Il Campo® Brushed (Granite)
Joint Spacing - 3 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits


		SMOOTH FINISH	BRUSHED FINISH
Bundle Type		RANDOM	RANDOM
Plant Produced		MICHIGAN	CHICAGO
Thickness (mm)		70 MM	70 MM
SQFT PER	Bundle	93.25	93.25
	Layer	11.66	11.66
	Section	-	-
	Stone	0.49	0.49
PER BUNDLE	Layers	8.00	8.00
	Sections	-	-
SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-
SAILOR LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-
UNITS PER	SqFt	2.06	2.06
	Section	-	-
	Bundle	192.00	192.00
LBS PER	Layer	373	370
	Section	-	-
	Bundle	2,986	2,963

COLORS	Reflectance	Stock	Stock
Birch	SR .28 SRI 30	✓	-
Granite (Il Campo)	SR .28 SRI 29	-	SO
Granite	SR .28 SRI 29	✓	-

LAYING PATTERN




Artline Fixed
Random A



BIRCH



GRANITE (IL CAMPO)



GRANITE

7 Unit Random Bundle		UNIT A 125 x 169 x 70mm 4 7/8 x 6 3/4 x 2 3/4" 32 units/Bundle .23 Sq.Ft./Stone
		UNIT B 125 x 262.5 x 70mm 4 7/8 x 10 3/8 x 2 3/4" 32 units/Bundle .35 Sq.Ft./Stone

7 Unit Random Bundle		UNIT C 125 x 337.5 x 70mm 4 7/8 x 13 3/8 x 2 3/4" 32 units/Bundle .45 Sq.Ft./Stone
		UNIT D 125 x 450 x 70mm 4 7/8 x 17 3/4 x 2 3/4" 32 units/Bundle .61 Sq.Ft./Stone
7 Unit Random Bundle		UNIT E 187.5 x 225 x 70mm 7 1/2 x 8 7/8 x 2 3/4" 32 units/Bundle .45 Sq.Ft./Stone
		UNIT F 187.5 x 337.5 x 70mm 7 1/2 x 13 3/8 x 2 3/4" 16 units/Bundle .58 Sq.Ft./Stone
7 Unit Random Bundle		UNIT G 187.5 x 450 x 70mm 7 1/2 x 17 3/4 x 2 3/4" 16 units/Bundle .91 Sq.Ft./Stone
		UNIT H 187.5 x 450 x 70mm 7 1/2 x 17 3/4 x 2 3/4" 16 units/Bundle .91 Sq.Ft./Stone

Notes: Il Campo finish is a Special Order Item - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Textured
Joint Spacing - 7 mm
Void - n/a

TECHNOLOGIES


ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits


LAYING PATTERNS




Beacon Hill Fixed
Random A



Beacon Hill Fixed
Random B



Beacon Hill Multi-
Unit Random C



BIRCH



FOSSIL



SIERRA

Bundle Type		RANDOM
Plant Produced		MICHIGAN
Thickness (mm)		60 MM

SQFT PER	Bundle	104.91
	Layer	11.66
	Section	-
	Stone	1.46

PER BUNDLE	Layers	9.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.80
	Section	-
	Layer	9.35
	Bundle	84.15

UNITS PER	SqFt	0.69
	Section	-
	Bundle	72.00

LBS PER	Layer	320
	Section	-
	Bundle	2,879

COLORS	Reflectance	Stock
Birch	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓

3 Unit Random Bundle



LARGE RECTANGLE
380 x 570 x 60mm
15 x 22 1/2 x 2 3/8"
18 Units/Bundle
2.08 SqFt/Stone



SQUARE
380 x 380 x 60mm
15 x 15 x 2 3/8"
27 units/Bundle
1.39 Sq.Ft./Stone



SMALL RECTANGLE
380 x 190 x 60mm
15 x 7 1/2 x 2 3/8"
27 units/Bundle
.69 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY.** This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Beacon Hill™ Smooth 60mm

ENDURACOLOR™



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth
Joint Spacing - 7 mm
Void - n/a

TECHNOLOGIES


ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits


LAYING PATTERNS



Beacon Hill Fixed Random A



Beacon Hill Fixed Random B



Beacon Hill Multi-Unit Random C

		XL	SM RECTANGLE
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN
Thickness (mm)	60 MM	60 MM	60 MM

SQFT PER	Bundle	104.91	104.91	104.91
	Layer	11.66	11.66	11.66
	Section	-	-	-
	Stone	1.46	5.83	0.78

PER BUNDLE	Layers	9.00	9.00	9.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	-	0.32	0.80
	Section	-	-	-
	Layer	-	3.74	9.35
	Bundle	-	33.66	84.15

SAILOR LNFT PER	SqFt	0.80	0.53	1.60
	Section	-	-	-
	Layer	9.35	6.23	18.70
	Bundle	84.15	56.07	168.31

UNITS PER	SqFt	0.69	0.17	1.29
	Section	-	-	-
	Bundle	72.00	18.00	135.00

LBS PER	Layer	320	320	320
	Section	-	-	-
	Bundle	2,879	2,879	2,879

COLORS	Reflectance	Stock	Stock	Stock
Birch	SR n/a SRI n/a	✓	-	-
Dark Charcoal	SR n/a SRI n/a	-	-	✓
Fossil	SR n/a SRI n/a	✓	-	✓
Granite	SR .28 SRI 29	✓	✓	✓
Grindstone NEW	SR n/a SRI n/a	✓	-	-
Ivory NEW	SR n/a SRI n/a	-	-	✓
Opal Blend	SR .24 SRI 24	✓	✓	-



BIRCH



DARK CHARCOAL



FOSSIL



GRANITE



GRINDSTONE



IVORY



OPAL BLEND

3 Unit Random Bundle				Single Units		
	LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 1/2 x 2 3/8" 18 Units/Bundle	SQUARE 380 x 380 x 60mm 15 x 15 x 2 3/8" 27 units/Bundle	SMALL RECTANGLE 380 x 190 x 60mm 15 x 7 1/2 x 2 3/8" 27 units/Bundle		XL UNIT 950 x 570 x 60mm 37 1/2 x 22 1/2 x 2 3/8" 18 units/Bundle 5.83 Sq.Ft./Stone	SMALL RECTANGLE 380 x 190 x 60mm 15 x 7 1/2 x 2 3/8" 135 units/Bundle .78 Sq.Ft./Stone
					XL available only in Granite & Opal	See chart for available colors

Notes: **SOLD IN FULL BUNDLES ONLY.** XL unit is produced and sold on a required refundable skid. This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth
Joint Spacing - 7 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™


Refined surface and long-lasting color

TECHNICAL INFORMATION


Conforms to ASTM C 936
Eligible for LEED v4.1 credits

Bundle Type		RANDOM
Plant Produced		MICHIGAN
Thickness (mm)		80 MM
SQFT PER	Bundle	73.22
	Layer	10.46
	Section	-
	Stone	1.31
PER BUNDLE	Layers	7.00
	Sections	-
SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-
SAILOR LNFT PER	SqFt	0.85
	Section	-
	Layer	8.86
	Bundle	62.01
UNITS PER	SqFt	0.76
	Section	-
	Bundle	56.00
LBS PER	Layer	383
	Section	-
	Bundle	2,679
COLORS		Reflectance
Fossil		SR n/a SRI n/a
Granite		SR .28 SRI 29
		Stock
Fossil		✓
Granite		✓

LAYING PATTERNS



Beacon Hill Fixed
Random A



Beacon Hill Fixed
Random B



FOSSIL



GRANITE

3 Unit Random Bundle



LARGE RECTANGLE
360 x 540 x 80mm
14 1/8 x 21 1/4 x 3 1/8"
14 Units/Bundle



SQUARE
360 x 360 x 80mm
14 1/8 x 14 1/8 x 3 1/8"
21 units/Bundle



SMALL RECTANGLE
360 x 180 x 80mm
14 1/8 x 7 1/16 x 3 1/8"
21 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY.** **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Smooth
Joint Spacing - 3 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™


Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

Bundle Type		RANDOM
Plant Produced		MICHIGAN
Thickness (mm)		70 MM
SQFT PER	Bundle	93.00
	Layer	11.63
	Section	-
	Stone	1.45
PER BUNDLE	Layers	8.00
	Sections	-
SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-
SAILOR LNFT PER	SqFt	1.03
	Section	-
	Layer	12.00
	Bundle	96.04
UNITS PER	SqFt	0.69
	Section	-
	Bundle	64.00
LBS PER	Layer	372
	Section	-
	Bundle	2,978
COLORS		Reflectance
Granite	SR n/a SRI n/a	✓
River	SR n/a SRI n/a	✓

LAYING PATTERN



Boulevard Fixed
Random B



GRANITE



RIVER

3 Unit Random Bundle		LARGE RECTANGLE 610 x 305 x 70mm 24 x 12 x 2 3/4" 24 Units/Bundle 2.00 SqFt/Stone
		MEDIUM RECTANGLE 457 x 305 x 70mm 18 x 12 x 2 3/4" 16 units/Bundle 1.50 Sq.Ft./Stone
		SQUARE 305 x 305 x 70mm 12 x 12 x 2 3/4" 24 units/Bundle 1.00 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY.** This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Textured
Joint Spacing - 7 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYSOAK™

Factory Sealed to provide integral stain resistance


COMFORT STEP™

Ultra-smooth surface texture


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

LAYING PATTERNS



Bristol Valley Fixed
Random A



Bristol Valley Fixed
Random B

Bundle Type		RANDOM
Plant Produced		CHICAGO
Thickness (mm)		60 MM

SQFT PER	Bundle	116.57
	Layer	11.66
	Section	-
	Stone	1.46

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.80
	Section	-
	Layer	9.35
	Bundle	93.50

UNITS PER	SqFt	0.69
	Section	-
	Bundle	80.00

LBS PER	Layer	324
	Section	-
	Bundle	3,241

COLORS	Reflectance	Stock
Bavarian	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	✓
Steel Mountain	SR n/a SRI n/a	✓



BAVARIAN



FOSSIL



STEEL MOUNTAIN

3 Unit Random Bundle



LARGE RECTANGLE
380 x 570 x 60mm
15 x 22 1/2 x 2 3/8"
20 Units/Bundle
2.08 SqFt/Stone



SQUARE
380 x 380 x 60mm
15 x 15 x 2 3/8"
30 units/Bundle
1.39 Sq.Ft./Stone



SMALL RECTANGLE
380 x 190 x 60mm
15 x 7 1/2 x 2 3/8"
30 units/Bundle
.69 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Smooth
Joint Spacing - 2 mm
Void - n/a

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix


ANTIQUED™

Distressed, timeworn finish


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

LAYING PATTERNS



Brussels Multi-Unit
Random AC



Brussels Multi-Unit
Random AD



COFFEE CREEK



DARK CHARCOAL



LIMESTONE



MAHOGANY ASH



SANDSTONE

	HALF	STANDARD	XL
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	AYR/MI	AYR/MI	AYR/MI
Thickness (mm)	70 MM	70 MM	70 MM

SQFT PER	Bundle	99.79	95.94	95.94
	Layer	12.47	11.99	11.99
	Section	14.26	-	31.98
	Stone	0.20	0.40	0.80

PER BUNDLE	Layers	8.00	8.00	8.00
	Sections	7.00	-	3.00

SOLDIER LNFT PER	SqFt	1.72	1.42	0.85
	Section	24.57	-	27.30
	Layer	21.50	17.03	10.24
	Bundle	172.00	136.22	81.90

SAILOR LNFT PER	SqFt	2.95	1.71	1.43
	Section	42.04	-	45.67
	Layer	36.79	20.47	17.13
	Bundle	294.30	163.78	137.00

UNITS PER	SqFt	5.05	2.50	1.25
	Section	72.00	-	40.00
	Bundle	504.00	240.00	120.00

LBS PER	Layer	399	383	384
	Section	457	-	1,024
	Bundle	3,195	3,064	3,072

COLORS	Reflectance	Stock	Stock	Stock
Coffee Creek	SR n/a SRI n/a	✓	✓	✓
Dark Charcoal	SR n/a SRI n/a	✓	-	-
Limestone	SR .28 SRI 29	✓	✓	✓
Mahogany Ash	SR n/a SRI n/a	✓	✓	✓
Sandstone	SR .41 SRI 46	✓	✓	✓

Single Units



HALF
104 x 173 x 70mm
4 x 6 7/8 x 2 3/4"
504 units/Bundle
.20 Sq.Ft./Stone



STANDARD
173 x 208 x 70mm
6 7/8 x 8 1/4 x 2 3/4"
240 units/Bundle
.40 Sq.Ft./Stone



XL
208 x 348 x 70mm
8 1/4 x 13 3/4 x 2 3/4"
120 units/Bundle
.80 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY.** Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Textured
Joint Spacing - 3 mm
Void - n/a

TECHNOLOGIES

EASYCLEAN™

Factory Sealed to provide integral stain resistance

ELEGANCE™

Timeless, long-lasting beauty with the combination of Realta and Ultima technologies

REALTA™

Cast from historical brick


ULTIMA™

Up to 4x stronger than poured-in-place concrete


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

LAYING PATTERNS



Copthorne BW_A



Copthorne RB_C



BASALT



BURGUNDY RED



BURNT CLAY



OLD OAK

Bundle Type		SINGLE
Plant Produced		AYR
Thickness (mm)		60 MM

SQFT PER	Bundle	89.20
	Layer	11.15
	Section	-
	Stone	0.15

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.43
	Section	-
	Layer	15.99
	Bundle	127.95

SAILOR LNFT PER	SqFt	4.41
	Section	-
	Layer	49.21
	Bundle	393.70

UNITS PER	SqFt	6.73
	Section	-
	Bundle	600.00

LBS PER	Layer	294
	Section	-
	Bundle	2,349

COLORS	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	✓
Old Oak	SR n/a SRI n/a	✓

Single Unit



STANDARD

65 x 200 x 60mm
2 5/8" x 7 7/8" x 2 3/8"
600 Units/Bundle
.15 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 74. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Textured
Joint Spacing - 15 mm
Void - n/a

TECHNOLOGIES

EASYSOIL™

Factory Sealed to provide integral stain resistance

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

REALA™

Cast from European cobblestones

ULTIMA™

Up to 4x stronger than poured-in-place concrete

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

Bundle Type		RANDOM
Plant Produced		AYR
Thickness (mm)		60 MM

SQFT PER	Bundle	98.30
	Layer	12.29
	Section	-
	Stone	0.26

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	2.25
	Section	-
	Layer	27.69
	Bundle	221.52

UNITS PER	SqFt	3.91
	Section	-
	Bundle	384.00

LBS PER	Layer	291
	Section	-
	Bundle	2,326

COLORS	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓

LAYING PATTERN



Courtstone Fixed
Random A



BASALT

5 Unit Random Bundle					
	XL RECTANGLE	LARGE RECTANGLE	RECTANGLE	SMALL RECTANGLE	SQUARE
	215 x 130 x 60mm	185 x 130 x 60mm	165 x 130 x 60mm	145 x 130 x 60mm	130 x 130 x 60mm
	8 3/8 x 5 1/8 x 2 3/8"	7 1/4 x 5 1/8 x 2 3/8"	6 1/2 x 5 1/8 x 2 3/8"	5 3/4 x 5 1/8 x 2 3/8"	5 1/8 x 5 1/8 x 2 3/8"
	128 Units/Bundle	64 Units/Bundle	64 Units/Bundle	64 Units/Bundle	64 Units/Bundle
	.30 SqFt/Stone	.28 SqFt/Stone	.23 SqFt/Stone	.20 SqFt/Stone	.18 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 74. Contact Unilock for more information.

**APPLICATIONS****APPEARANCE**

Edge Detail - Chamfer

Surface Texture - Smooth

Joint Spacing - 7 mm

Void - 7.30%

TECHNOLOGIES**CLASSIC**

Budget-friendly traditional product mix

PERMEABLE

Can be installed to allow water to flow through

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	STANDARD SMOOTH
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	80 MM

SQFT PER	Bundle	63.56
	Layer	9.08
	Section	-
	Stone	0.50

PER BUNDLE	Layers	7.00
	Sections	-


SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	1.98
	Section	-
	Bundle	126.00

LBS PER	Layer	332
	Section	-
	Bundle	2,325

COLORS	Reflectance	Stock
Natural	SR .30 SRI 32	SO

LAYING PATTERN

Eco-Optiloc Cluster A



NATURAL

Single Unit

**STANDARD**

250 x 250 x 80mm

9 7/8 x 9 7/8 x 3 1/8"

126 units/Bundle

.50 Sq.Ft./Stone

Notes: **Special Order Item - Lead time required.** Most standard colors are available by special order and are subject to minimum quantities. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on an optional skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
Surface Texture - Smooth
Joint Spacing - 7mm
Void - 4.6-7.08%

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix

ENDURACOLOR™

Refined surface and long-lasting color


PERMEABLE

Can be installed to allow water to flow through


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

LAYING PATTERNS



Eco-Priora 5x10
RB_A



Eco-Priora 5x10
HB_E

	SMOOTH CLASSIC	SMOOTH ENDURACOLOR
Bundle Type	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN
Thickness (mm)	80 MM	80 MM

SQFT PER	Bundle	75.95	75.95
	Layer	10.85	10.85
	Section	-	-
	Stone	0.31	0.31

PER BUNDLE	Layers	7.00	7.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	1.27	1.27
	Section	-	-
	Layer	13.78	13.78
	Bundle	96.46	96.46

SAILOR LNFT PER	SqFt	2.54	2.54
	Section	-	-
	Layer	27.56	27.56
	Bundle	192.91	192.91

UNITS PER	SqFt	3.23	3.23
	Section	-	-
	Bundle	245.00	245.00

LBS PER	Layer	397	397
	Section	-	-
	Bundle	2,778	2,778

COLORS	Reflectance	Stock	Stock
Beechwood	SR .n/a SRI n/a	✓	-
Fossil NEW	SR .n/a SRI n/a	-	✓
Granite NEW	SR .26 SRI 27	-	✓



BEECHWOOD



FOSSIL



GRANITE

Single Unit



RECTANGLE

120 x 240 x 80mm
4 ¾ x 9 ½ x 3 ⅛
245 units/Bundle
.31 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on an optional, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth
Joint Spacing - 7 mm
Void - 10.12%

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

PERMEABLE

Can be installed to allow water to flow through

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

	3"X12" PERMEABLE SMOOTH
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	100 MM

SQFT PER	Bundle	63.94
	Layer	10.66
	Section	-
	Stone	0.24

PER BUNDLE	Layers	6.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Section	-
	Layer	10.83
	Bundle	64.96


SAILOR LNFT PER	SqFt	4.06
	Section	-
	Layer	43.31
	Bundle	259.84

UNITS PER	SqFt	4.13
	Section	-
	Bundle	264.00


LBS PER	Layer	482
	Section	-
	Bundle	2,893

COLORS	Reflectance	Stock
Opal Blend	SR .24 SRI 24	SO
Steel Grey	SR .n/a SRI n/a	SO


LAYING PATTERNS



Eco-Promenade
3x12_RB_A



Eco-Promenade
3x12_DHB_B



Eco-Promenade
3x12_HB_C



OPAL BLEND



STEEL GREY

Single Unit



3X12 SMOOTH
75 x 300 x 100mm
3 x 11⁷/₈ x 3⁷/₈"
264 units/Bundle
.24 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on an optional, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



(Note: Hex only is drive friendly)

APPLICATIONS



APPEARANCE

Edge Detail - Rounded

Surface Texture - Granito/Granito Textured (Random)

Joint Spacing - 7 mm

Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

ARTISTA™

Boldly mottled color finish

EASYCLEAN™


Factory Sealed to provide integral stain resistance

TECHNICAL INFORMATION


Conforms to ASTM C 936

Eligible for LEED v4.1 credits

LAYING PATTERNS



Granito Hex_A



Granito Fixed Random_A



NOTTE HEX



SABIA HEX



NOTTE RANDOM



SABIA RANDOM

	8"X8" HEX ENDURACOLOR	ENDURACOLOR
Bundle Type	SINGLE	RANDOM
Plant Produced	PICKERING	PICKERING
Thickness (mm)	70 MM	60 MM

SQFT PER	Bundle	73.92	94.14
	Layer	9.24	10.46
	Section	-	-
	Stone	0.39	1.31

PER BUNDLE	Layers	8.00	9.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-

SAILOR LNFT PER	SqFt	-	0.85
	Section	-	-
	Layer	-	8.86
	Bundle	-	79.72

UNITS PER	SqFt	2.60	0.76
	Section	-	-
	Bundle	192.00	72.00

LBS PER	Layer	306	287
	Section	-	-
	Bundle	2,450	2,583

COLORS	Reflectance	Stock	Stock
Notte Hex	SR n/a SRI n/a	SO	-
Sabia Hex	SR n/a SRI n/a	SO	-
Notte Random	SR n/a SRI n/a	-	SO
Sabia Random	SR n/a SRI n/a	-	SO

3-Unit Random Bundle



SMALL RECTANGLE
180 x 360 x 60mm
7 x 14 1/4 x 2 3/8"
27 units/Bundle



SQUARE
360 x 360 x 60mm
14 1/4 x 14 1/4 x 2 3/8"
27 units/Bundle



LARGE RECTANGLE
360 x 540 x 60mm
14 1/4 x 21 1/4 x 2 3/8"
18 units/Bundle

Single Unit



HEX
200 x 200 x 70mm
7 7/8 x 7 7/8 x 2 3/4"
192 units/Bundle
.39 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
Surface Texture - Smooth
Joint Spacing - 3 mm
Void - n/a

TECHNOLOGIES


ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

LAYING PATTERN



Hex Paver_A



DARK CHARCOAL



GRANITE

Single Unit



HEX
200 x 200 x 70mm
7 7/8 x 7 7/8 x 2 3/4"
192 Units/Bundle
.39 SqFt/Stone

HEX 8"X8" SMOOTH ENDURACOLOR	
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	70 MM

SQFT PER	Bundle	73.92
	Layer	9.24
	Section	-
	Stone	0.39

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	2.60
	Section	-
	Bundle	192.00

LBS PER	Layer	306
	Section	-
	Bundle	2,450

COLORS	Reflectance	Stock
Dark Charcoal	SR .n/a SRI n/a	✓
Granite	SR .n/a SRI n/a	✓

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
Surface Texture - Smooth
Joint Spacing - 3 mm
Void - n/a

TECHNOLOGIES


CLASSIC

Budget-friendly traditional product mix


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

LAYING PATTERNS



Hollandstone 4x8
RB_B



Hollandstone 4x8
HB_C



BEECHWOOD



RUSTIC RED



SANDSTONE



TERRA COTTA

	SMOOTH	SMOOTH
Bundle Type	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN
Thickness (mm)	60 MM	80 MM

SQFT PER	Bundle	106.20	82.60
	Layer	11.80	11.80
	Section	17.70	13.77
	Stone	0.22	0.22

PER BUNDLE	Layers	9.00	7.00
	Sections	6.00	6.00

SOLDIER LNFT PER	SqFt	1.50	1.50
	Section	26.57	20.67
	Layer	17.72	17.71
	Bundle	159.45	124.00

SAILOR LNFT PER	SqFt	3.00	-
	Section	53.15	-
	Layer	35.43	-
	Bundle	318.90	-

UNITS PER	SqFt	4.58	4.58
	Section	81.00	63.00
	Bundle	486.00	378.00

LBS PER	Layer	324	426
	Section	486	497
	Bundle	2,914	2,985

COLORS	Reflectance	Stock	Stock
Beechwood	SR n/a SRI n/a	✓	SO
Rustic Red	SR n/a SRI n/a	✓	SO
Sandstone	SR n/a SRI n/a	WHILE SUPPLIES LAST	-
Terra Cotta	SR n/a SRI n/a	✓	SO

Single Unit



4" X 8"
100 x 200 x 60mm
3 7/8 x 7 7/8 x 2 3/8"
486 units/Bundle
.22 Sq.Ft./Stone



4" X 8"
100 x 200 x 80mm
3 7/8 x 7 7/8 x 3 1/8"
378 units/Bundle
.22 Sq.Ft./Stone

Notes: Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on an optional, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
Surface Texture - Smooth
Joint Spacing - 3 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits


LAYING PATTERNS



Holland Prem 4x8
RB_B




Holland Prem 4x8
HB_C



Holland Prem 4x8
BW_D



CHARLESTON



DARK CHARCOAL



FOSSIL



GRANITE



IVORY

SMOOTH ENDURACOLOR	
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	60 MM

SQFT PER	Bundle	106.20
	Layer	11.80
	Section	17.70
	Stone	0.22

PER BUNDLE	Layers	9.00
	Sections	6.00

SOLDIER LNFT PER	SqFt	1.50
	Section	26.57
	Layer	17.72
	Bundle	159.45

SAILOR LNFT PER	SqFt	3.00
	Section	53.15
	Layer	35.43
	Bundle	318.90

UNITS PER	SqFt	4.58
	Section	81.00
	Bundle	486.00

LBS PER	Layer	324
	Section	486
	Bundle	2,914

COLORS	Reflectance	Stock
Charleston	SR n/a SRI n/a	✓
Dark Charcoal	SR n/a SRI n/a	✓
Fossil	SR .22 SRI 21	✓
Granite	SR n/a SRI n/a	✓
Ivory NEW	SR n/a SRI n/a	✓

Single Unit



4" X 8"
100 x 200 x 60mm
3 1/8 x 7 7/8 x 2 3/8"
486 units/Bundle
.22 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY.** **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Il Campo® Brushed
Joint Spacing - 3 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

		BRUSHED ENDURACOLOR
Bundle Type		SINGLE
Plant Produced		PICKERING
Thickness (mm)		70 MM

SQFT PER	Bundle	94.40
	Layer	11.80
	Section	15.73
	Stone	0.22

PER BUNDLE	Layers	8.00
	Sections	6.00

SOLDIER LNFT PER	SqFt	1.50
	Section	23.62
	Layer	17.72
	Bundle	141.73


SAILOR LNFT PER	SqFt	3.00
	Section	47.24
	Layer	35.43
	Bundle	283.46

UNITS PER	SqFt	4.58
	Section	72.00
	Bundle	432.00


LBS PER	Layer	377
	Section	502
	Bundle	3,014

COLORS	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓


LAYING PATTERNS



Il Campo 4x8_RB_F



Il Campo 4x8_SB_G



Il Campo 4x8_HB_H



DARK CHARCOAL

Single Unit



4x8

100 x 200 x 70mm
3 3/8 x 7 7/8 x 2 3/4"
432 Units/Bundle
.22 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Smooth
Joint Spacing - 4 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color


ANTIQUED™

Distressed, timeworn finish


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits


LAYING PATTERNS



RB_A



HB_C



DHB_D



COCOA BROWN



DARK CHARCOAL



GRANITE FUSION



SABLE

	STANDARD SMOOTH
Bundle Type	SINGLE
Plant Produced	MARENGO
Thickness (mm)	70 MM

SQFT PER	Bundle	89.28
	Layer	11.16
	Section	-
	Stone	0.16

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.27
	Section	-
	Layer	14.17
	Bundle	113.39

SAILOR LNFT PER	SqFt	5.08
	Section	-
	Layer	56.69
	Bundle	453.54

UNITS PER	SqFt	6.45
	Section	-
	Bundle	576.00

LBS PER	Layer	357
	Section	-
	Bundle	2,859

COLORS	Reflectance	Stock
Cocoa Brown	SR n/a SRI n/a	✓
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
Sable	SR n/a SRI n/a	✓

Single Unit



STANDARD

60 x 240 x 70mm
2 3/8 x 9 1/2 x 2 3/4"
576 Units/Bundle
.16 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS




APPEARANCE

Edge Detail - Zero
Surface Texture - Brushed / Riven
Joint Spacing - 0 mm
Void - n/a


TECHNICAL INFORMATION

Visit Unilock.com for more information.


LAYING PATTERNS



Natural Stone
12x24 RB A



Natural Stone
24x24 RB B



Natural Stone
Multi-Unit C



IVORY SAND



GOLDEN SAND



STONE CLIFF GREY



BLACK RIVER

	12" X 24"	18" X 24"	24" X 24"	24" X 36"
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	22 MM	22 MM	22 MM	22 MM

SQFT PER	Crate	180.00	186.00	160.00	180.00
	Units	2.00	3.00	4.00	6.00

UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17

LBS PER	Unit	24	36	48	72
	Crate	2,149	2,221	1,910	2,149

COLORS	Reflectance	Stock	Stock	Stock	Stock
Ivory Sand	SR n/a SRI n/a	✓	✓	✓	✓
Golden Sand	SR n/a SRI n/a	✓	✓	✓	✓
Stone Cliff Grey	SR n/a SRI n/a	✓	✓	✓	✓
Black River	SR n/a SRI n/a	✓	✓	✓	✓

Single Units



12 X 24"
300 x 600 x 22mm
11 7/8 x 23 5/8 x 7/8"
2.0 Sq.Ft./Stone



18 X 24"
450 x 600 x 22mm
17 3/4 x 23 5/8 x 7/8"
3.0 Sq.Ft./Stone



24 X 24"
600 x 600 x 22mm
23 5/8 x 23 5/8 x 7/8"
4.0 Sq.Ft./Stone



24 X 36"
600 x 900 x 22mm
23 5/8 x 35 1/2 x 7/8"
6.0 Sq.Ft./Stone

Notes: **SOLD IN FULL CRATES ONLY** and all units except the 24x24" require a refundable skid. This product is not intended for vehicular applications. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.

Natural Stone

Steps, Coping and Pillar Caps




APPLICATIONS



	48" X 16" STEP
Bundle Type	SINGLE
Thickness (mm)	150 MM

FCFT PER	Crate	32.00
LNFT PER	Crate	24.00
UNITS PER	Crate	6.00
LBS PER	Crate	2,526

COLORS	Stock
Ivory Sand	✓
Golden Sand	✓
Stone Cliff Grey	✓
Black River (Limestone)	✓

Natural Limestone Pillar Caps		NATURAL LIMESTONE PILLAR CAP 740 x 740 x 75mm 29 x 29 x 3"	NATURAL LIMESTONE PILLAR CAP 813 x 813 x 75mm 32 x 32 x 3"
	Chart is not displayed; Cap sold by the piece.		

	48 X 14" BULLNOSE COPING	48 X 12" BULLNOSE COPING	48 X 12" NATURAL EDGE COPING	48 X 14" NATURAL EDGE COPING	24 X 24" SANDSTONE PILLAR CAP	28 X 28" SANDSTONE PILLAR CAP	24 X 24" LIMESTONE PILLAR CAP	28 X 28" LIMESTONE PILLAR CAP
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	50 MM	50 MM	50 MM	50 MM	65 MM	65 MM	65 MM	65 MM

UNITS PER	Crate	20.00	20.00	20.00	20.00	14.00	12.00	14.00	12.00
	SqFt	-	-	-	-	-	-	-	-

LBS PER	Unit	-	-	-	-	137	210	137	210
	Crate	2,557	2,116	2,116	2,557	1,914	2,514	1,914	2,514

COLORS	Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock
Ivory Sand	✓	✓	✓	✓	✓	✓	✓	-	-
Golden Sand	✓	✓	✓	✓	✓	✓	✓	-	-
Stone Cliff Grey	✓	✓	✓	✓	✓	✓	✓	-	-
Black River	✓	✓	✓	✓	✓	-	-	✓	✓

48" Step		NATURAL EDGE STEP 48 X 16" 1,200 x 150 x 400mm 47 1/4 x 5 7/8 x 15 3/4"	Pillar Caps		SANDSTONE PILLAR CAP 600 x 600 x 65mm 23 5/8 x 23 5/8 x 2 5/8"		LIMESTONE PILLAR CAP 600 x 600 x 65mm 23 5/8 x 23 5/8 x 2 5/8"
					SANDSTONE PILLAR CAP 710 x 710 x 65mm 28 x 28 x 2 5/8"		LIMESTONE PILLAR CAP 710 x 710 x 65mm 28 x 28 x 2 5/8"
Coping		48 X 12" BULLNOSE COPING 1,200 x 50 x 300mm 47 1/4 x 2 x 11 7/8"			48 X 14" BULLNOSE COPING 1,200 x 50 x 350mm 47 1/4 x 2 x 13 7/8"		
		48 X 12" NATURAL EDGE COPING 1,200 x 50 x 300mm 47 1/4 x 2 x 11 7/8"			48 X 14" NATURAL EDGE COPING 1,200 x 50 x 350mm 47 1/4 x 2 x 13 7/8"		

Notes: Steps, Coping & Pillar Caps require a refundable skid. This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Porcelain



APPLICATIONS




APPEARANCE

Edge Detail - n/a
Surface Texture - Stone Finish
Joint Spacing - n/a
Void - n/a


TECHNICAL INFORMATION

Visit Unilock.com for more information.

LAYING PATTERNS



Porcelain 24x24
RB_A



Porcelain 24x24
SB_B



GOTHAM GREY



GOTHAM NERO



TRAVSTONE BEIGE

	DEL CONCA SQUARE PRESSED EDGE
Bundle Type	SINGLE
Plant Produced	
Thickness (mm)	20 MM

SQFT PER	Pallet	248.00
	Box	7.75
	Unit	3.88

PER PALLET	Box	32.00
	SqFt	248.00
	Unit	64.00

UNITS PER	Pallet	64.00
	Box	2.00

LBS PER	Unit	36
	SqFt	9
	Box	72
	Pallet	2,289

COLORS	Reflectance	Stock
Gotham Grey	SR n/a SRI n/a	SO
Gotham Nero	SR n/a SRI n/a	SO
Travestone Beige	SR n/a SRI n/a	SO

Single Unit



DEL CONCA SQUARE
600 x 600 x 20mm
23 5/8 x 23 5/8 x 3/4"
3.88 Sq.Ft./Stone

Notes: **SOLD IN FULL PALLETS ONLY.** **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. **Product is not intended for vehicular applications.**

Porcelain



APPLICATIONS



APPEARANCE

Edge Detail - n/a
 Surface Texture - Woodgrain Finish (DelConca)
 & Stone Finish
 Joint Spacing - n/a
 Void - n/a

TECHNICAL INFORMATION

Visit Unilock.com for more information.

LAYING PATTERNS



Porcelain 16x32
RB_C



Porcelain 16x32
HB_D



ARBOR BIANCO



TRAVSTONE BEIGE



TRAVSTONE GREY

		DEL CONCA RECTANGLE PRESSED EDGE	DEL CONCA RECTANGLE PRESSED EDGE
Bundle Type		SINGLE	SINGLE
Plant Produced		STONE FINISH	WOOD GRAIN FINISH
Thickness (mm)		20 MM	20 MM
SQFT PER	Pallet	165.36	165.36
	Box	6.89	6.89
	Unit	3.45	3.45
PER PALLET	Box	24.00	24.00
	SqFt	165.36	165.36
	Unit	48.00	48.00
UNITS PER	Pallet	48.00	48.00
	Box	2.00	2.00
LBS PER	Unit	32	32
	SqFt	9	9
	Box	64	64
	Pallet	1,538	1,538

COLORS	Reflectance	Stock	
Arbor Bianco	SR n/a SRI n/a	-	SO
Travestone Beige	SR n/a SRI n/a	SO	-
Travestone Grey	SR n/a SRI n/a	SO	-

Single Unit		DEL CONCA RECTANGLE STONE FINISH 400 x 800 x 20mm 15 ¾ x 31 ½ x ¾" 3.45 Sq.Ft./Stone		DEL CONCA RECTANGLE WOOD GRAIN FINISH 400 x 800 x 20mm 15 ¾ x 31 ½ x ¾" 3.45 Sq.Ft./Stone

Notes: **SOLD IN FULL PALLETS ONLY.** **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. **Product is not intended for vehicular applications.**



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth, Series™ Exposed
& Il Campo® Brushed
Joint Spacing - 4 mm
Void - n/a

TECHNOLOGIES


ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

LAYING PATTERNS



Promenade 4x12
RB_H



Promenade 4x12
HB_I



BLACK GRANITE



DARK CHARCOAL



GRANITE BLEND



LIGHT GREY



OPAL BLEND



SANDSTONE



STEEL GREY BLEND

	4X12" SMOOTH	4X12" SERIES	4X12" IL CAMPO
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	GEORGETOWN	GEORGETOWN	GEORGETOWN
Thickness (mm)	100 MM	100 MM	100 MM

SQFT PER	Bundle	58.13	58.13	58.13
	Layer	11.63	11.63	11.63
	Section	-	-	-
	Stone	0.32	0.32	0.32

PER BUNDLE	Layers	5.00	5.00	5.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	1.02	1.02	1.02
	Section	-	-	-
	Layer	11.81	11.81	11.81
	Bundle	59.06	59.06	59.06

SAILOR LNFT PER	SqFt	3.05	3.05	3.05
	Section	-	-	-
	Layer	35.43	35.43	35.43
	Bundle	177.17	177.17	177.17

UNITS PER	SqFt	3.10	3.10	3.10
	Section	-	-	-
	Bundle	180.00	180.00	180.00

LBS PER	Layer	532	532	526
	Section	-	-	-
	Bundle	2,659	2,659	2,629

COLORS	Reflectance	Stock	Stock	Stock
Black Granite (Series)	SR n/a SRI n/a	-	SO	-
Dark Charcoal (Il Campo)	SR n/a SRI n/a	-	-	SO
Granite Blend (Il Campo)	SR n/a SRI n/a	-	-	SO
Light Grey (Il Campo)	SR n/a SRI n/a	-	-	SO
Opal Blend (Smooth)	SR .24 SRI 24	SO	-	-
Sandstone (Smooth)	SR n/a SRI n/a	SO	-	-
Steel Grey Blend (Smooth)	SR n/a SRI n/a	SO	-	-

Single Unit		4" X 12" SMOOTH 100 x 300 x 100mm 3 7/8 x 11 7/8 x 3 1/8" 180 units/Bundle .32 Sq.Ft./Stone
Single Unit		4" X 12" SERIES EXPOSED 100 x 300 x 100mm 3 7/8 x 11 7/8 x 3 7/8" 180 units/Bundle .32 Sq.Ft./Stone
Single Unit		4" X 12" IL CAMPO BRUSHED 100 x 300 x 100mm 3 7/8 x 11 7/8 x 3 7/8" 180 units/Bundle .32 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Promenade™ Plank Paver 4x16" - 100mm

ENDURACOLOR™



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth
Joint Spacing - 4 mm
Void - n/a

TECHNOLOGIES


ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

LAYING PATTERNS



Promenade 4x16
HB_C



Promenade 4x16
RB_A



OPAL BLEND



STEEL GREY BLEND

	4X16"
	SMOOTH
Bundle Type	SINGLE
Plant Produced	GEORGETOWN / MI
Thickness (mm)	100 MM

SQFT PER	Bundle	51.67
	Layer	10.33
	Section	-
	Stone	0.43

PER BUNDLE	Layers	5.00
	Sections	-

SOLDIER LNFT PER	SqFt	0.76
	Section	-
	Layer	7.87
	Bundle	39.37

SAILOR LNFT PER	SqFt	3.05
	Section	-
	Layer	31.50
	Bundle	157.48

UNITS PER	SqFt	2.32
	Section	-
	Bundle	120.00

LBS PER	Layer	488
	Section	-
	Bundle	2,440

COLORS	Reflectance	Stock
Opal Blend (Smooth)	SR .24 SRI 24	SO
Steel Grey Blend (Smooth)	SR n/a SRI n/a	SO

Single Unit



4" X 16" SMOOTH
100 x 400 x 100mm
3 7/8 x 15 3/4 x 3 7/8"
120 units/Bundle
.43 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth, Series™ Exposed
& Il Campo® Brushed
Joint Spacing - 4 mm
Void - n/a

TECHNOLOGIES


ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

LAYING PATTERNS



Promenade 8x24
HB_F



Promenade 8x24
RB_D

	8X24" SMOOTH	8X24" SERIES	8X24" IL CAMPO
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	PICKERING	PICKERING	PICKERING
Thickness (mm)	100 MM	100 MM	100 MM

SQFT PER	Bundle	51.67	51.67	51.67
	Layer	10.33	10.33	10.33
	Section	-	-	-
	Stone	1.29	1.29	1.29

PER BUNDLE	Layers	5.00	5.00	5.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	0.51	0.51	0.51
	Section	-	-	-
	Layer	5.25	5.25	5.25
	Bundle	26.25	26.25	26.25

SAILOR LNFT PER	SqFt	1.52	1.52	1.52
	Section	-	-	-
	Layer	15.75	15.75	15.75
	Bundle	78.74	78.74	78.74

UNITS PER	SqFt	0.77	0.77	0.77
	Section	-	-	-
	Bundle	40.00	40.00	40.00

LBS PER	Layer	478	478	478
	Section	-	-	-
	Bundle	2,391	2,391	2,391

COLORS	Reflectance	Stock	Stock	Stock
Black Granite (Series)	SR n/a SRI n/a	-	SO	-
Dark Charcoal (Il Campo)	SR n/a SRI n/a	-	-	SO
Granite Blend (Il Campo)	SR n/a SRI n/a	-	-	SO
Light Grey (Il Campo)	SR n/a SRI n/a	-	-	SO
Opal Blend (Smooth)	SR .24 SRI 24	SO	-	-
Steel Grey Blend (Smooth)	SR n/a SRI n/a	SO	-	-



BLACK GRANITE



DARK CHARCOAL




GRANITE BLEND



LIGHT GREY



OPAL BLEND



STEEL GREY BLEND

Single Unit		8" X 24" SMOOTH 200 x 600 x 100mm 7 7/8 x 23 5/8 x 3 7/8" 40 units/Bundle 1.29 Sq.Ft./Stone
Single Unit		8" X 24" SERIES EXPOSED 200 x 600 x 100mm 7 7/8 x 23 5/8 x 3 7/8" 40 units/Bundle 1.29 Sq.Ft./Stone
Single Unit		8" X 24" IL CAMPO BRUSHED 200 x 600 x 100mm 7 7/8 x 23 5/8 x 3 7/8" 40 units/Bundle 1.29 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Textured
Joint Spacing - 10 mm
Void - n/a

TECHNOLOGIES

EASYSOAK™

Factory Sealed to provide integral stain resistance

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

REALA™

Cast from natural stone.


ULTIMA™

Up to 4x stronger than poured-in-place concrete


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

LAYING PATTERNS



Richcliff Fixed
Random A



Richcliff Fixed
Random B



Richcliff Large Rec
HB_H



DAWN MIST



PEBBLE TAUPE

3 Unit Random Bundle				Single Unit	Available while supplies last in Pebble Taupe	
		RECTANGLE 226 x 300 x 60mm 8 7/8 x 11 7/8 x 2 3/8" 64 Units/Bundle .75 Sq.Ft./Stone				
		SQUARE 226 x 226 x 60mm 8 7/8 x 8 7/8 x 2 3/8" 32 units/Bundle .58 Sq.Ft./Stone				
		SMALL RECTANGLE 150 x 226 x 60mm 5 7/8 x 8 7/8 x 2 3/8" 64 units/Bundle .38 Sq.Ft./Stone				
						LARGE RECTANGLE 302 x 528 x 60mm 11 7/8 x 20 7/8 x 2 3/8" 48 units/Bundle 1.72 Sq.Ft./Stone

		LARGE RECTANGLE	
Bundle Type		RANDOM	SINGLE
Plant Produced		AYR	AYR
Thickness (mm)		60 MM	60 MM

SQFT PER	Bundle	90.30	82.39
	Layer	11.29	10.30
	Section	-	-
	Stone	0.56	1.72

PER BUNDLE	Layers	8.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.58
	Section	-	-
	Layer	-	5.94
	Bundle	-	47.56

SAILOR LNFT PER	SqFt	1.31	1.01
	Section	-	-
	Layer	14.78	10.39
	Bundle	118.22	83.15

UNITS PER	SqFt	1.77	0.58
	Section	-	-
	Bundle	160.00	48.00

LBS PER	Layer	309	301
	Section	-	-
	Bundle	2,472	2,411

COLORS	Reflectance	Stock	Stock
Dawn Mist	SR n/a SRI n/a	✓	-
Pebble Taupe	SR n/a SRI n/a	✓	WHILE SUPPLIES LAST

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product can be used for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
Surface Texture - Series Exposed
Joint Spacing - 3mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

	SERIES EXPOSED
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

SQFT PER	Bundle	118.00
	Layer	11.80
	Section	19.67
	Stone	0.22

PER BUNDLE	Layers	10.00
	Sections	6.00

SOLDIER LNFT PER	SqFt	1.50
	Section	29.53
	Layer	17.72
	Bundle	177.17

SAILOR LNFT PER	SqFt	3.00
	Section	59.06
	Layer	35.43
	Bundle	354.33


UNITS PER	SqFt	4.58
	Section	90.00
	Bundle	540.00

LBS PER	Layer	306
	Section	511
	Bundle	3,065


COLORS	Reflectance	Stock
Golden Tan	SR .40 SRI 45	SO
Onyx Black	SR n/a SRI n/a	✓

ONYX BLACK 100 X 200 X 70MM AVAILABLE WHILE SUPPLIES LAST.


LAYING PATTERNS




Series 4x8_HB_F



Series 4x8_HB_G



GOLDEN TAN



ONYX BLACK

Single Unit



4 X 8
100 x 200 x 60mm
3 7/8 x 7 7/8 x 2 3/8"
540 units/Bundle
.22 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unlock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth
Joint Spacing - 2mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 1782
Eligible for LEED v4.1 credits

	24 X 24
Bundle Type	SINGLE
Plant Produced	MARENGO
Thickness (mm)	50 MM

SQFT PER	Bundle	80.00
	Layer	8.00
	Section	-
	Stone	4.00

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	0.50
	Section	-
	Layer	4.00
	Bundle	40.00


SAILOR LNFT PER	SqFt	0.50
	Section	-
	Layer	4.00
	Bundle	40.00

UNITS PER	SqFt	0.25
	Section	-
	Bundle	20.00


LBS PER	Layer	183
	Section	-
	Bundle	1,833

COLORS	Reflectance	Stock
Chamois	SR .41 SRI 46	SO


LAYING PATTERNS



Skyline 24x24 SB_A



Skyline 24x24 RB_B



CHAMOIS

Single Unit



24 x 24
606 x 606 x 50mm
23 7/8 x 23 7/8 x 2"
20 units/Bundle
4.00 Sq.Ft./Stone

Pedestal System
Contact your local Unilock Rep for more information.



Notes: **Special Order items, lead time is required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Product is not intended vehicular applications.** Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. All measurements are nominal.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
Surface Texture - Smooth
Joint Spacing - 0 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™

Factory Sealed to provide integral stain resistance


COMFORT STEP™

Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 1782
Eligible for LEED v4.1 credits

LAYING PATTERN



Soreno 16x32 RB-A

		16 X 32
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	50 MM

SQFT PER	Bundle	64.27
	Layer	3.57
	Section	-
	Stone	3.57

PER BUNDLE	Layers	18.00
	Sections	-

SOLDIER LNFT PER	SqFt	0.37
	Section	-
	Layer	1.34
	Bundle	24.04

SAILOR LNFT PER	SqFt	0.75
	Section	-
	Layer	2.67
	Bundle	48.13

UNITS PER	SqFt	0.28
	Section	-
	Bundle	18.00

LBS PER	Layer	86
	Section	-
	Bundle	1,550


COLORS	Reflectance	Stock
Light Granite	SR n/a SRI n/a	SO
Toscana Beige	SR n/a SRI n/a	SO



LIGHT GRANITE



TOSCANA BEIGE



X & T Slab Spacers
Bagged Separately
(see page 76)

Single Unit

16 X 32
407 x 815 x 50mm
16 x 32 x 2"
18 units/Bundle
3.57 Sq.Ft./Stone

Pedestal System
Contact your local Unilock Rep for more information.

Notes: **Special Order** - minimum quantities may apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **This product is not intended for vehicular applications. Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Textured
Joint Spacing - 11-18 mm
Void - 4.4%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

Bundle Type		RANDOM
Plant Produced		MICHIGAN
Thickness (mm)		70 MM

SQFT PER	Bundle	88.61
	Layer	11.08
	Section	-
	Stone	0.92

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	1.08
	Section	-
	Bundle	96.00


LBS PER	Layer	355
	Section	-
	Bundle	2,837

COLORS	Reflectance	Stock
Birch	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓

LAYING PATTERNS



Thornbury Fixed
Random A



Thornbury Fixed
Random B



Thornbury Fixed
Random C



BIRCH



SIERRA

Random Bundle		LARGE RECTANGLE 350 x 420 x 70mm 13 1/8" x 16 5/8" x 2 3/4" 32 Units/Bundle		MEDIUM RECTANGLE 210 x 350 x 70mm 8 3/8" x 13 7/8" x 2 3/4" 32 units/Bundle		SMALL RECTANGLE 173 x 210 x 70mm 6 7/8" x 8 3/8" x 2 3/4" 32 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced on an optional, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Textured
Joint Spacing - 10 mm
Void - 6.50%

TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through

EASYCLEAN™

Factory Sealed to provide integral stain resistance

ELEGANCE™

Timeless, long-lasting beauty with the combination of Realta and Ultima technologies

REALTA™

Cast from historical brick

ULTIMA™

Up to 4x stronger than poured-in-place concrete

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

	4 X 10
Bundle Type	SINGLE
Plant Produced	AYR
Thickness (mm)	70 MM

SQFT PER	Bundle	88.41
	Layer	11.050000
	Section	-
	Stone	.28

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.19
	Section	-
	Layer	13.12
	Bundle	104.99


SAILOR LNFT PER	SqFt	2.97
	Section	-
	Layer	32.81
	Bundle	262.47

UNITS PER	SqFt	3.62
	Section	-
	Bundle	320.00


LBS PER	Layer	361
	Section	-
	Bundle	2,888

COLORS	Reflectance	Stock
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	✓
Old Oak	SR n/a SRI n/a	✓
Basalt	SR n/a SRI n/a	✓

LAYING PATTERNS



Town Hall 4x10 HB_B



Town Hall 4x10 RB_C



BASALT



BURGUNDY RED



BURNT CLAY



OLD OAK

Single Unit



4 X 10
100 x 250 x 70mm
3 7/8 x 9 7/8 x 2 3/4"
320 units/Bundle
.28 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 7mm
 Void - 5.5%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™



Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits.

		SMOOTH
Bundle Type		RANDOM
Plant Produced		MICHIGAN
Thickness (mm)		60 MM
SQFT PER	Bundle	105.18
	Layer	11.69
	Section	-
	Stone	0.56
PER BUNDLE	Layers	9.00
	Sections	-
SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-
SAILOR LNFT PER	SqFt	1.57
	Section	-
	Layer	18.35
	Bundle	165.11
UNITS PER	SqFt	1.80
	Section	-
	Bundle	189.00
LBS PER	Layer	321
	Section	-
	Bundle	2,886
COLORS		Reflectance
Fossil	SR n/a SRI n/a	✓
Granite	SR n/a SRI n/a	✓
Tuscany	SR n/a SRI n/a	✓

LAYING PATTERNS



Treo Fixed Random_R Treo Fixed Random_S






FOSSIL



GRANITE



TUSCANY

Random Bundle		LARGE RECTANGLE 225 x 337.5 x 60mm 8 7/8 x 13 3/8 x 2 3/8" 54 units/Bundle .82 Sq.Ft./Stone		SQUARE 225 x 225 x 60mm 8 7/8 x 8 7/8 x 2 3/8" 63 units/Bundle .55 Sq.Ft./Stone		SMALL RECTANGLE 112.5 x 225 x 60mm 4 1/2 x 8 7/8 x 2 3/8" 72 units/Bundle .27 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on an optional, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro

Surface Texture - Series Exposed Textured

Joint Spacing - 10mm

Void - 5.6%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

		SERIES EXPOSED TEXTURED
Bundle Type		RANDOM
Plant Produced		CHICAGO
Thickness (mm)		70 MM

SQFT PER	Bundle	97.53
	Layer	12.19
	Section	-
	Stone	0.32

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	2.34
	Section	-
	Layer	28.49
	Bundle	227.95

UNITS PER	SqFt	3.12
	Section	-
	Bundle	304.00

LBS PER	Layer	378
	Section	-
	Bundle	3,021

COLORS	Reflectance	Stock
Cobalt Grey	SR n/a SRI n/a	SO
Peppered Granite	SR .38 SRI 42	SO

LAYING PATTERN




Tribeca Cobble Fixed
Random_A



COBALT GREY



PEPPERED GRANITE

Random Bundle		LARGE RECTANGLE 130 x 305 x 70mm 5 x 12 x 2 ¾" 88 units/Bundle .43 Sq.Ft./Stone		RECTANGLE 130 x 230 x 70mm 5 x 9 x 2 ¾" 88 units/Bundle .32 Sq.Ft./Stone		SMALL RECTANGLE 130 x 175 x 70mm 5 x 6 ¾ x 2 ¾" 128 units/Bundle .25 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. For permeable installations, Unilock recommends using granite chips for joint filler. For traditional applications, please refer to the Polymeric Sand Best Practices on page 78. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Smooth
Joint Spacing - 2mm
Void - 40%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

CLASSIC

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C1319
Eligible for LEED v4.1 credits

		SMOOTH
	Bundle Type	SINGLE
	Plant Produced	MICHIGAN
	Thickness (mm)	80 MM

SQFT PER	Bundle	80.00
	Layer	10.00
	Section	-
	Stone	2.50

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	0.40
	Section	-
	Bundle	32.00

LBS PER	Layer	247
	Section	-
	Bundle	1,975

COLORS	Reflectance	Stock
Natural	SR .30 SRI 32	✓

LAYING PATTERN



Turfstone A



NATURAL

Single Unit



STANDARD
400 x 600 x 80mm
15 3/4 x 23 5/8 x 3 1/8"
32 units/Bundle
2.50 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on an optional, refundable skid. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Umbriano Mottled
Joint Spacing - 3mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™

Factory Sealed to provide integral stain resistance


COLORFUSION™

Subtly mottled colored finish


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

LAYING PATTERNS



Umbriano Fixed
Random_A



Umbriano Fixed
Random_B

Bundle Type	RANDOM
Plant Produced	GEORGETOWN
Thickness (mm)	60 MM

SQFT PER	Bundle	94.14
	Layer	10.46
	Section	-
	Stone	1.31

PER BUNDLE	Layers	9.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.85
	Section	-
	Layer	8.86
	Bundle	79.72

UNITS PER	SqFt	0.76
	Section	-
	Bundle	72.00

LBS PER	Layer	287
	Section	-
	Bundle	2,583

COLORS	Reflectance	Stock
French Grey	SR .18 SRI 17	✓
Summer Wheat	SR .42 SRI 48	✓
Winter Marvel	SR .35 SRI 38	✓



FRENCH GREY



SUMMER WHEAT



WINTER MARVEL

Random Bundle



LARGE RECTANGLE
350 x 546 x 60mm
13 7/8 x 21 1/2 x 2 3/8"
18 units/Bundle



SQUARE
360 x 360 x 60mm
14 1/4 x 14 1/4 x 2 3/8"
27 units/Bundle



SMALL RECTANGLE
180 x 360 x 60mm
7 x 14 1/4 x 2 3/8"
27 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



(Note: 8x16" only is drive friendly)

APPLICATIONS



APPEARANCE

Edge Detail - Zero

Surface Texture - Umbriano Mottled

Joint Spacing - 3mm

Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYSOAK™

Factory Sealed to provide integral stain resistance

COLORFUSION™


Subtly mottled colored finish

TECHNICAL INFORMATION


Conforms to ASTM C 936

Eligible for LEED v4.1 credits

LAYING PATTERNS



Umbriano 24x24
RB_AG



Umbriano 12x24
HB_O

	8x16	12x24	16x16	24x24
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	GEORGETOWN	GEORGETOWN	GEORGETOWN	GEORGETOWN
Thickness (mm)	70 MM	70 MM	70 MM	70 MM

SQFT PER	Bundle	82.67	93.00	82.67	62.00
	Layer	10.33	11.63	10.33	7.75
	Section	27.56	-	-	-
	Stone	0.86	1.94	1.72	3.88

PER BUNDLE	Layers	8.00	8.00	8.00	8.00
	Sections	3.00	-	-	-

SOLDIER LNFT PER	SqFt	0.76	0.51	0.76	0.51
	Section	21.00	-	-	-
	Layer	7.87	5.91	7.87	3.94
	Bundle	62.99	47.24	62.99	31.50

SAILOR LNFT PER	SqFt	1.52	1.02	0.76	0.51
	Section	41.99	-	-	-
	Layer	15.75	11.81	7.87	3.94
	Bundle	125.98	94.49	62.99	31.50

UNITS PER	SqFt	1.16	0.52	0.58	0.26
	Section	32.00	-	-	-
	Bundle	96.00	48.00	48.00	16.00

LBS PER	Layer	343	393	350	258
	Section	915	-	-	-
	Bundle	2,746	3,142	2,797	2,062

COLORS	Reflectance	Stock	Stock	Stock	Stock
French Grey	SR .18 SRI 17	SO	SO	SO	SO
Midnight Sky	SR .17 SRI 15	SO	-	-	-
Summer Wheat	SR .42 SRI 48	SO	SO	SO	SO
Winter Marvel	SR .35 SRI 38	SO	SO	SO	SO



FRENCH GREY



MIDNIGHT SKY



SUMMER WHEAT



WINTER MARVEL

Single Units



8 x 16
200 x 400 x 70mm
7 7/8 x 15 3/4 x 2 3/4"
96 units/Bundle
.86 Sq.Ft./Stone



12 x 24
300 x 600 x 70mm
11 7/8 x 23 5/8 x 2 3/4"
48 units/Bundle
1.94 Sq.Ft./Stone



16 x 16
400 x 400 x 70mm
15 3/4 x 15 3/4 x 2 3/4"
48 units/Bundle
1.72 Sq.Ft./Stone



24 x 24
600 x 600 x 70mm
23 5/8 x 23 5/8 x 2 3/4"
16 units/Bundle
3.88 Sq.Ft./Stone

Notes: **Special Order items, lead time is required. SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Textured
 Joint Spacing - 3-7mm
 Void - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

CLASSIC COAT

Factory-sealed to protect surface texture and color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

Bundle Type		RANDOM
Plant Produced		MICHIGAN
Thickness (mm)		70 MM

SQFT PER	Bundle	94.19
	Layer	11.77
	Section	-
	Stone	0.59

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	1.24
	Section	-
	Layer	14.57
	Bundle	116.56

UNITS PER	SqFt	1.70
	Section	-
	Bundle	160.00


LBS PER	Layer	367
	Section	-
	Bundle	2,937

COLORS	Reflectance	Stock
Beechwood	SR n/a SRI n/a	✓
Granite	SR n/a SRI n/a	✓

LAYING PATTERNS



Westport Fixed
Random_A



Westport Fixed
Random_B



BEECHWOOD



GRANITE

Random Bundle



LARGE RECTANGLE
 254 x 380 x 70mm
 10 x 15 x 2 3/4"
 32 units/Bundle



SQUARE
 254 x 254 x 70mm
 10 x 10 x 2 3/4"
 56 units/Bundle



SMALL RECTANGLE
 127 x 254 x 70mm
 5 x 10 x 2 3/4"
 72 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on an optional, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's

Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Standard

Joint Spacing - 2mm

Void - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	STANDARD CLASSIC ANTIQUED
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	100 MM

FCFT PER	Bundle	32.00
	Layer	5.33
	Stone	0.33

PER BUNDLE	Layers	6.00
	Sections	4.00

LNFT PER	Bundle	96.00
	Unit	1.00

UNITS PER	SqFt	3.00
	Section	24.00
	Bundle	96.00

LBS PER	Layer	473
	Section	709
	Bundle	2,836

COLORS		Stock
Coffee Creek	SR n/a SRI n/a	✓
Midnight Charcoal	SR n/a SRI n/a	✓
Limestone	SR n/a SRI n/a	✓
Mahogany Ash	SR n/a SRI n/a	✓
Sandstone	SR n/a SRI n/a	✓



ROUND

SUNSET FIREPIT KITS

Available in the following colors
- see Page 68:

- Coffee Creek
- Limestone
- Mahogany Ash
- Sandstone



COFFEE CREEK



MIDNIGHT CHARCOAL



LIMESTONE



MAHOGANY ASH



SANDSTONE

Single Unit



STANDARD

300 x 100 x 200mm

11 7/8 x 3 7/8 x 7 7/8"

96 units/Bundle

.33 Fc.Ft./Stone

Notes: Fire Pit Kits are sold in full bundles only on an optional skid. Maximum height is 24" (under optimum conditions). *Based on 12" deep wall coverage = 21.4 sqft per bundle. Based on an 8" deep wall coverage = 32 sqft per bundle. LedgeStone, Brussels XL or Smooth Fullnose complement as a possible coping unit. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:
contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Standard

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	STANDARD	STANDARD 1/2	TIE-BACK	CORNER 45° (Left & Right)	CORNER 90° (Left & Right)
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY	GORMLEY	GORMLEY	GORMLEY
Thickness (mm)	300 MM	300 MM	300 MM	300 MM	300 MM

FCFT PER	Bundle	6.02	3.00	-	7.04	7.04
	Layer	6.02	3.00	2.00	7.04	7.04
	Stone	6.02	3.00	2.00	7.04	7.04

PER BUNDLE	Layers	1.00	1.00	-	1.00	1.00
	Sections	-	-	-	-	-

LNFT PER	Bundle	6.02	3.00	-	-	-
	Unit	6.02	3.00	-	-	-

UNITS PER	SqFt	0.17	0.33	0.50	0.14	0.14
	Section	-	-	-	-	-
	Bundle	1.00	1.00	-	1.00	1.00

LBS PER	Layer	1,680	800	1,660	1,480	1,320
	Section	-	-	-	-	-
	Bundle	1,680	800	-	1,480	1,320

COLORS		Stock	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO	SO	SO



NATURAL

Single Units					
	STANDARD 1830 x 300 x 600mm 72 x 11 7/8 x 23 5/8" 1 unit/Bundle 6.02 Fc.Ft./Stone	1/2 STANDARD 915 x 300 x 600mm 36 x 11 7/8 x 23 5/8" 1 unit/Bundle 3.00 Fc.Ft./Stone	TIE-BACK 600 x 300 x 1830mm 23 5/8 x 11 7/8 x 72" 1 unit/Bundle 2.00 Fc.Ft./Stone	CORNER 45° 1520 x 300 x 600mm 59 7/8 x 11 7/8 x 23 5/8" 1 unit/Bundle 7.04 Fc.Ft./Stone	CORNER 90° 1520 x 300 x 600mm 59 7/8 x 11 7/8 x 23 5/8" 1 unit/Bundle 7.04 Fc.Ft./Stone

Notes: *Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on an required, refundable skid. Palletized 2 pieces per pallet. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soil information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Standard

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	COPING 1/2	COPING STANDARD	COPING CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY	GORMLEY
Thickness (mm)	300 MM	300 MM	300 MM

FCFT PER	Bundle	2.95	6.02	6.02
	Layer	2.95	6.02	6.02
	Stone	2.95	6.02	6.02

PER BUNDLE	Layers	1.00	1.00	1.00
	Sections	-	-	-

LNFT PER	Bundle	-	-	-
	Unit	-	-	-




UNITS PER	SqFt	0.34	0.17	0.17
	Section	-	-	-
	Bundle	1.00	1.00	1.00

LBS PER	Layer	780	1,560	1,560
	Section	-	-	-
	Bundle	780	1,560	1,560

COLORS		Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO



NATURAL

Single Units			
	1/2 COPING	COPING	CLOSED-END COPING
	915 x 300 x 600mm	1830 x 300 x 600mm	1830 x 300 x 600mm
	36 x 11 7/8 x 23 5/8"	72 x 11 7/8 x 23 5/8"	72 x 11 7/8 x 23 5/8"
	1 unit/Bundle	1 unit/Bundle	1 unit/Bundle
	2.95 Fc.Ft./Stone	6.02 Fc.Ft./Stone	6.02 Fc.Ft./Stone

Notes: *Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on an required, refundable skid. Palletized, 2 pieces per pallet. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soil information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Standard

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	TIE-BACK	STANDARD	CORNER 90° (Left & Right)	COPING	COPING CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY	GORMLEY	GORMLEY	GORMLEY
Thickness (mm)	300 MM	300 MM	300 MM	300 MM	300 MM

FCFT PER	Bundle	4.68	24.10	16.67	24.08	24.08
	Layer	1.17	6.02	4.17	6.02	6.02
	Stone	1.17	6.02	4.17	6.02	6.02

PER BUNDLE	Layers	4.00	4.00	4.00	4.00	4.00
	Sections	-	-	-	-	-

LNFT PER	Bundle	-	24.10	-	24.10	24.10
	Unit	-	6.02	-	6.02	6.02






UNITS PER	SqFt	0.85	0.17	0.24	0.17	0.17
	Section	-	-	-	-	-
	Bundle	4.00	4.00	4.00	4.00	4.00

LBS PER	Layer	938	938	460	884	884
	Section	-	-	-	-	-
	Bundle	3,752	3,752	1,840	3,536	3,536

COLORS		Stock	Stock	Stock	Stock	Stock
Natural		SO	SO	SO	SO	SO



NATURAL

Single Units					
	TIE-BACK 360 x 300 x 1830mm 14 1/4 x 11 7/8 x 72" 4 unit/Bundle 1.17 Fc.Ft./Stone	Corner 90° 900 x 300 x 360mm 35 1/2 x 11 7/8 x 14 1/4" 4 unit/Bundle 4.17 Fc.Ft./Stone	STANDARD 1830 x 300 x 360mm 72 x 11 7/8 x 14 1/4" 4 unit/Bundle 6.02 Fc.Ft./Stone	COPING 1830 x 300 x 360mm 72 x 11 7/8 x 14 1/4" 4 unit/Bundle 6.02 Fc.Ft./Stone	CLOSED-END COPING 1830 x 300 x 360mm 72 x 11 7/8 x 14 1/4" 4 unit/Bundle 6.02 Fc.Ft./Stone

Notes: *Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on an required, refundable skid. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soil information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Split

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	TAPERED SPLIT CLASSIC ANTIQUED	CORNER SPLIT CLASSIC ANTIQUED	COPING TAPERED CLASSIC ANTIQUED
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	150 MM	150 MM	75 MM

FCFT PER	Bundle	31.25	20.83	18.74
	Layer	6.25	4.17	2.34
	Stone	0.52	0.52	0.26

PER BUNDLE	Layers	5.00	5.00	8.00
	Sections	4.00	4.00	3.00

LNFT PER	Bundle	62.30	41.60	66.00
	Unit	1.04	1.04	.92

UNITS PER	SqFt	1.92	1.92	3.84
	Section	15.00	10.00	24.00
	Bundle	60.00	40.00	72.00

LBS PER	Layer	608	436	299
	Section	760	545	797
	Bundle	3,040	2,179	2,392

COLORS		Stock	Stock	Stock
Granite	SR n/a SRI n/a	✓	✓	✓
Sandstone	SR n/a SRI n/a	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓








GRANITE



SANDSTONE



SIERRA

Random Bundle				Single Units		
	LARGE TAPERED 380 x 150 x 230mm 15 x 5 7/8 x 9" 20 units/Bundle .63 Fc.Ft./Stone	MEDIUM TAPERED 320 x 150 x 230mm 12 5/8 x 5 7/8 x 9" 20 units/Bundle .52 Fc.Ft./Stone	SMALL TAPERED 250 x 150 x 230mm 9 7/8 x 5 7/8 x 9" 20 units/Bundle .42 Fc.Ft./Stone		CORNER SPLIT 320 x 150 x 230mm 12 5/8 x 5 7/8 x 9" 40 units/Bundle .52 Sq.Ft./Stone	COPING TAPERED 320 x 75 x 300mm 12 5/8 x 3 x 11 7/8" 72 units/Bundle .26 Sq.Ft./Stone

Notes: 6" random wall bundles have convertible large units that can be used for corners or ending seat walls. End caps not sold separately. LedgeStone™ coping, Brussels Block® XL or Brussels Fullnose™ complement as a possible coping. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Standard

Joint Spacing - n/a

Void - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	RANDOM CLASSIC	PILLAR CLASSIC
Bundle Type	RANDOM	SINGLE
Plant Produced	MICHIGAN	MICHIGAN
Thickness (mm)	100 MM	100 MM

FCFT PER	Bundle	29.92	29.97
	Layer	9.97	9.99
	Stone	0.50	0.33

PER BUNDLE	Layers	3.00	3.00
	Sections	3.00	-

LNFT PER	Bundle	89.06	-
	Unit	1.48	-

UNITS PER	SqFt	2.01	3.00
	Section	20.00	-
	Bundle	60.00	90.00

LBS PER	Layer	881	893
	Section	881	-
	Bundle	2,643	2,679

COLORS		Stock	Stock
Limestone	SR.n/a SRI n/a	✓	✓
Midnight Charcoal	SR.n/a SRI n/a	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓




LIMESTONE



MIDNIGHT CHARCOAL



SANDSTONE

Random Bundle		XL RECTANGLE 600 x 100 x 200mm 23 3/8 x 3 7/8 x 7 7/8 15 units/Bundle
		LARGE RECTANGLE 500 x 100 x 200mm 19 3/4 x 3 7/8 x 7 7/8 15 units/Bundle
		RECTANGLE 400 x 100 x 200mm 15 3/4 x 3 7/8 x 7 7/8 15 units/Bundle
		SMALL RECTANGLE 300 x 100 x 200mm 11 7/8 x 3 7/8 x 7 7/8 15 units/Bundle
		CORNER/PILLAR 300 x 100 x 200mm 11 7/8 x 3 7/8 x 7 7/8 90 units/Bundle .33 Fc.Ft./Stone
Single Unit		

Notes: Sold in full bundles only and is produced and sold on an optional, refundable skid. Spacing strips are shipped with random wall and pillar bundles to create even spacing between units. LedgeStone™ or Unilock Natural Stone complement as possible coping options. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Split & Standard (coping)

Joint Spacing - n/a

Void - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	CORNER DOUBLE SPLIT CLASSIC	TAPERED SPLIT CLASSIC	COPING CLASSIC
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN
Thickness (mm)	150 MM	150 MM	75 MM

FCFT PER	Bundle	20.17	20.00	20.34
	Layer	6.72	6.67	2.91
	Stone	1.68	0.67	0.48

PER BUNDLE	Layers	3.00	3.00	7.00
	Sections	4.00	2.00	2.00

LNFT PER	Bundle	-	40.00	82.95
	Unit	-	1.33	1.97

UNITS PER	SqFt	0.59	1.50	2.06
	Section	3.00	15.00	21.00
	Bundle	12.00	30.00	42.00

LBS PER	Layer	440	860	393
	Section	330	1,290	1,375
	Bundle	1,320	2,580	2,750

COLORS		Stock	Stock	Stock
Beechwood	SR.n/a SRI n/a	✓	✓	✓
Charcoal	SR.n/a SRI n/a	✓	✓	✓
Granite	SR.n/a SRI n/a	✓	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓	✓



BEECHWOOD



CHARCOAL



GRANITE



SANDSTONE

Single Units



CORNER

300 x 150 x 200mm
11 7/8 x 5 7/8 x 7 7/8"
12 units/Bundle
1.68 Fc.Ft./Stone



TAPERED SPLIT

200 x 150 x 300mm
7 7/8 x 5 7/8 x 11 7/8"
30 units/Bundle
.67 Fc.Ft./Stone




COPING

300 x 75 x 300mm
11 7/8 x 3 x 11 7/8"
42 units/Bundle
.48 Fc.Ft./Stone

Notes: * **TAPERED WALL UNITS ARE DOUBLE UNITS AND ARE SOLD IN FULL BUNDLES ONLY.** 12" Coping bundle has 16 units of closed-end coping (8 left and 8 right). Closed-end 12" coping is not sold separately. Maximum height - 36" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. The set back on Pisa wall is 3/4" every course or 1 1/2" every 2 courses. Retaining wall engineering software is also available free of charge at www.unilock.com. Walls greater than 4' in height require professional engineering. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:
contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Split & Standard (coping)
Joint Spacing - n/a
Void - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	CORNER	XL TAPERED	COPING
Bundle Type	SINGLE	SINGLE	MULTI-COMPONENT
Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN
Thickness (mm)	150 MM	150 MM	75 MM

FCFT PER	Bundle	46.52	20.67	15.50
	Layer	11.63	5.17	1.94
	Stone	0.97	0.65	0.32

PER BUNDLE	Layers	4.00	4.00	8.00
	Sections	-	-	-

LNFT PER	Bundle	-	42.00	62.99
	Unit	-	1.31	1.31

UNITS PER	SqFt	1.03	1.55	3.10
	Section	-	-	-
	Bundle	48.00	32.00	48.00

LBS PER	Layer	695	627	282
	Section	-	-	-
	Bundle	2,780	2,508	2,256

COLORS		Stock	Stock	Stock
Fieldstone	SR.n/a SRI n/a	✓	✓	✓
Granite	SR.n/a SRI n/a	✓	✓	✓




FIELDSTONE




GRANITE


Single Units



CORNER
400 x 150 x 200mm
15 3/4 x 5 7/8 x 7 7/8"
48 units/Bundle
.97 Fc.Ft./Stone



XL TAPERED
400 x 150 x 300mm
15 3/4 x 5 7/8 x 11 7/8"
32 units/Bundle
.65 Fc.Ft./Stone



COPING - MULTI-COMPONENT
400 x 75 x 325mm
15 3/4 x 3 x 12 3/4"
48 units/Bundle
.32 Fc.Ft./Stone

Notes: * **COPING UNITS ARE DOUBLE UNITS AND ARE SOLD IN FULL BUNDLES ONLY.** 12" Coping bundle has 48 units of coping (24 regular and 24 closed-end). Closed-end 12" coping is not sold separately. Maximum height - 36" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. The set back on Pisa wall is 3/4" every course or 1 1/2" every 2 courses. Retaining wall engineering software is also available free of charge at www.unilock.com. Walls greater than 4' in height require professional engineering. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's

Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth

Joint Spacing - n/a

Void - n/a

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	STANDARD SMOOTH	COPING SMOOTH
Bundle Type	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO
Thickness (mm)	180 MM	180 MM

FCFT PER	Bundle	23.25	23.25
	Layer	7.75	7.75
	Stone	1.94	1.94

PER BUNDLE	Layers	3.00	3.00
	Sections	-	-

LNFT PER	Bundle	39.37	39.37
	Unit	3.28	3.28

UNITS PER	SqFt	0.52	0.52
	Section	-	-
	Bundle	12.00	12.00

LBS PER	Layer	1,029	1,029
	Section	-	-
	Bundle	3,086	3,086

COLORS		Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓



GRANITE

Single Units



STANDARD CORNER
1000 x 180 x 290mm
39 3/8 x 7 x 11 1/2"
12 units/Bundle
1.94 Fc.Ft./Stone



COPING
1000 x 180 x 290mm
39 3/8 x 7 x 11 1/2"
12 units/Bundle
1.94 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Split

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	CORNER 90° SPLIT	CORNER 45° SPLIT	STANDARD 500 SPLIT	STANDARD 925 SPLIT	COPING SPLIT	COPING SPLIT C-E
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY	GORMLEY	GORMLEY	GORMLEY	GORMLEY
Thickness (mm)	185 MM	185 MM	185 MM	185 MM	185 MM	185 MM

FCFT PER	Bundle	19.11	-	14.43	7.21	14.43	14.43
	Layer	6.37	-	4.81	2.40	4.81	4.81
	Stone	3.19	-	2.41	2.40	2.41	2.41

PER BUNDLE	Layers	3.00	3.00	3.00	3.00	3.00	3.00
	Sections	-	-	3.00	-	3.00	3.00

LNFT PER	Bundle	-	-	24.00	12.00	23.70	23.70
	Unit	-	-	4.00	4.00	3.95	3.95







UNITS PER	SqFt	0.31	-	0.42	0.42	0.42	0.42
	Section	-	-	2.00	-	2.00	2.00
	Bundle	6.00	6.00	6.00	3.00	6.00	6.00

LBS PER	Layer	1,140	1,050	1,140	1,140	1,140	1,140
	Section	-	-	1,140	-	1,140	1,140
	Bundle	3,420	3,150	3,420	3,420	3,420	3,420

COLORS	Stock	Stock	Stock	Stock	Stock	Stock	Stock
Natural	SO	SO	SO	SO	SO	SO	✓



NATURAL

Single Units						
	CORNER 90° SPLIT 1100 x 185 x 500mm 43 3/8 x 7 3/8 x 19 3/4" 6 units/Bundle 3.19 Fc.Ft./Stone	CORNER 45° SPLIT 1100 x 185 x 500mm 43 3/8 x 7 3/8 x 19 3/4" 6 units/Bundle	STANDARD 500 SPLIT 1200 x 185 x 500mm 47 1/4 x 7 3/8 x 19 3/4" 6 units/Bundle 2.41 Fc.Ft./Stone	STANDARD 925 SPLIT 1200 x 185 x 925mm 47 1/4 x 7 3/8 x 36 1/2" 3 units/Bundle 2.40 Fc.Ft./Stone	COPING SPLIT 1200 x 185 x 500mm 47 1/4 x 7 3/8 x 19 3/4" 6 units/Bundle 2.41 Fc.Ft./Stone	COPING C-E SPLIT 1200 x 185 x 500mm 47 1/4 x 7 3/8 x 19 3/4" 6 units/Bundle 2.41 Fc.Ft./Stone

Notes: **Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY** and is sold on a required, refundable skid. Stocked CE is sold by the piece. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a

Surface Texture - Standard

CROSS SECTIONS

Cross Sections are available on Unilock's

Contractor website under Products:

contractor.unilock.com

TECHNOLOGIES

CLASSIC™ (Coping)

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	SIENASTONE 38½" DOUBLE CORNER	SIENASTONE 48" SMOOTH WALL	SIENASTONE 48" SMOOTH COPING	SIENASTONE 48" SMOOTH COPING CLOSED-END R & L
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY	GORMLEY	GORMLEY
Thickness (mm)	180 MM	180 MM	180 MM	180 MM

FCFT PER	Bundle	15.71	20.93	20.93	20.93
	Layer	5.24	6.98	6.98	6.98
	Stone	5.24	2.33	2.33	2.33

PER BUNDLE	Layers	3.00	3.00	3.00	3.00
	Sections	-	-	-	-

LNFT PER	Bundle	-	36.00	36.00	36.00
	Unit	-	4.00	4.00	4.00

UNITS PER	SqFt	0.19	0.43	0.43	0.43
	Section	-	-	-	-
	Bundle	3.00	9.00	9.00	9.00

LBS PER	Layer	648	1,182	1,185	1,185
	Section	-	-	-	-
	Bundle	1,944	3,546	3,555	3,555

COLORS		Stock	Stock	Stock	Stock
Granite		✓	✓	✓	✓



GRANITE

Single Units				
	CORNER UNIT 375	STANDARD 375	48" COPING	48" COPING CLOSED-END R OR L
	975 x 180 x 375mm	1200 x 180 x 375mm	1200 x 180 x 383mm	1200 x 180 x 383mm
	38 ½ x 7 x 14 ⅞"	47 ¼ x 7 x 14 ⅞"	47 ¼ x 7 x 15"	47 ¼ x 7 x 15"
	3 units/Bundle 5.24 Fc.Ft./Stone	9 units/Bundle 2.33 Fc.Ft./Stone	9 units/Bundle 2.33 Fc.Ft./Stone	9 units/Bundle 2.33 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is sold on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a

Surface Texture - Standard

CROSS SECTIONS

Cross Sections are available on Unilock's

Contractor website under Products:

contractor.unilock.com

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	SIENASTONE 48" SMOOTH STEP	SIENASTONE 72" SMOOTH STEP
Bundle Type	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY
Thickness (mm)	180 MM	180 MM

FCFT PER	Bundle	13.95	6.97
	Layer	4.65	3.49
	Stone	2.33	3.49

PER BUNDLE	Layers	3.00	2.00
	Sections	-	-

LNFT PER	Bundle	24.00	11.81
	Unit	4.00	5.91

UNITS PER	SqFt	0.43	0.29
	Section	-	-
	Bundle	6.00	2.00

LBS PER	Layer	1,081	798
	Section	-	-
	Bundle	3,242	1,596

COLORS		Stock	Stock
Dusk NEW	SR.n/a SRI n/a	✓	SO
Granite Blend NEW	SR.n/a SRI n/a	✓	SO
Light Grey	SR.n/a SRI n/a	WHILE SUPPLIES LAST	-
Midnight Charcoal	SR.n/a SRI n/a	✓	SO
Safari NEW	SR.n/a SRI n/a	✓	SO
Tan	SR.n/a SRI n/a	WHILE SUPPLIES LAST	-



DUSK



GRANITE BLEND



LIGHT GREY



MIDNIGHT CHARCOAL



SAFARI



TAN

Single Units		48" STEP 1200 x 180 x 500mm 47 1/4 x 7 x 19 3/4" 6 units/Bundle 2.33 Fc.Ft./Stone		72" STEP 1800 x 180 x 500mm 70 7/8 x 7 x 19 3/4" 2 units/Bundle 3.49 Fc.Ft./Stone


Notes: Product is sold on a required, refundable skid. All measurements are nominal. 72" Step sold in full pallets only. Contact Unilock for more information.

U-Cara® Multi-Face Wall System

ENDURACOLOR™



APPLICATIONS



APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth, Series Exposed, Umbriano® Mottled & Pitched

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits




1/2 Running Bond




1/2 Running Bond with Linear Accents



1/2 Running Bond with Random Accents




1/2 Running Bond with Paver Accents




Mixed Bond



1/3 Running Bond




Stacked Bond



Stacked Bond with Accents

Pitched Finish



Smooth Finish



Umbriano Finish



Series Finish



3" PANEL

	Standard 6" Fascia Smooth	Closed-End 6" Fascia Smooth	Standard 3" Fascia Smooth	Standard 3" Fascia Series Exposed	Standard 6" Fascia Umbriano	Closed-End 6" Fascia Umbriano	Standard 6" Fascia Pitched	Closed-End 6" Fascia Pitched
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN	CHICAGO	GEORGETOWN	GEORGETOWN	MICHIGAN	MICHIGAN
Thickness (mm)	150 MM	150 MM	71 MM	71 MM	150 MM	150 MM	150 MM	150 MM

FCFT PER	Bundle	61.52	54.18	63.20	59.32	61.49	54.18	61.52	54.18
	Layer	10.25	9.03	10.53	9.89	10.25	9.03	10.25	9.03
	Stone	0.73	1.29	0.19	0.18	0.73	1.29	0.73	1.29

PER BUNDLE	Layers	6.00	6.00	6.00	6.00	6.00	6.00	6.00	6.00
	Sections	-	-	-	-	-	-	-	-

LNFT PER	Bundle	129.50	104.86	-	-	-	104.86	129.50	104.86
	Unit	1.54	2.50	-	-	-	2.50	1.54	2.50

UNITS PER	SqFt	1.37	0.78	5.32	5.66	1.37	0.78	1.37	0.78
	Section	-	-	-	-	-	-	-	-
	Bundle	84.00	42.00	336.00	336.00	84.00	42.00	84.00	42.00


LBS PER	Layer	252	207	242	250	252	213	291	236
	Section	-	-	-	-	-	-	-	-
	Bundle	1,513	1,240	1,453	1,501	1,513	1,240	1,745	1,415

COLORS			Stock	Stock	Stock	Stock	Stock	Stock	Stock
Dark Charcoal	SR.n/a	SRI n/a	✓	✓	-	-	-	-	-
Fossil	SR.n/a	SRI n/a	✓	✓	While Supplies Last	-	-	-	✓
French Grey	SR.n/a	SRI n/a	-	-	-	-	SO	SO	-
Granite	SR.n/a	SRI n/a	✓	✓	-	-	-	-	✓
Midnight Sky	SR.n/a	SRI n/a	-	-	-	-	SO	SO	-
Natural	SR.n/a	SRI n/a	✓	✓	-	-	-	While Supplies Last	While Supplies Last
Onyx Black	SR.n/a	SRI n/a	-	-	-	✓	-	-	-
Summer Wheat	SR.n/a	SRI n/a	-	-	-	-	SO	SO	-
Sierra	SR.n/a	SRI n/a	✓	✓	-	-	-	-	✓
Winter Marvel	SR.n/a	SRI n/a	-	-	-	-	SO	SO	-

Fascia Panel - 6"		6" STANDARD FASCIA PANEL 5 7/8 x 18 3/4 x 2 3/8" 150 x 466 x 60mm 84 units/Bundle .73 Sq.Ft./Stone	Natural Pitched available while supplies last.	Fascia Panel - 3"		3" FASCIA PANEL 2 7/8 x 9 x 2 3/8" 71 x 231 x 60mm 336 units/Bundle .18 Sq.Ft./Stone	Fossil available while supplies last.
2 Unit Corner		STANDARD FASCIA HALF PANEL 5 7/8 x 9 1/4 x 2 3/8" 150 x 233 x 60mm 42 units/Bundle				CLOSED-END FASCIA PANEL 5 7/8 x 20 7/8 x 2 3/8" 150 x 530 x 60mm 42 units/Bundle	Natural Pitched available while supplies last.



APPLICATIONS



CROSS SECTIONS

All Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth, Series

Exposed, Umbriano® Mottled &

Pitched

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

COLORFUSION™


Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

U-CARA RETAINING WALL GEOGRID SECTION

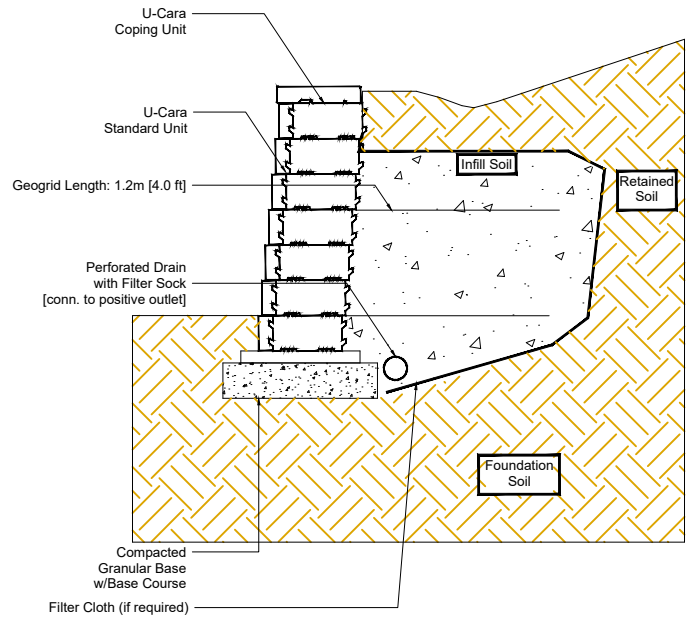


Download the U-Cara Multi-Face Wall Installation Guide.

U-CARA®

CROSS SECTION

Garden Wall - Max Height 15"

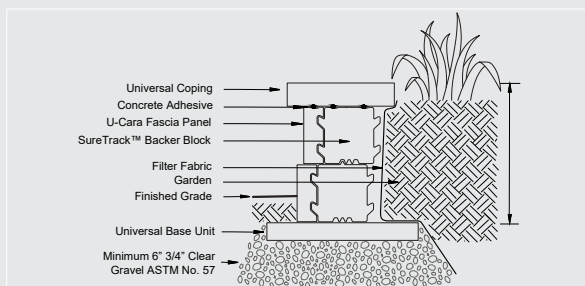


Notes:
This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

U-CARA®

CROSS SECTION

Seat Wall - Max Height 21"

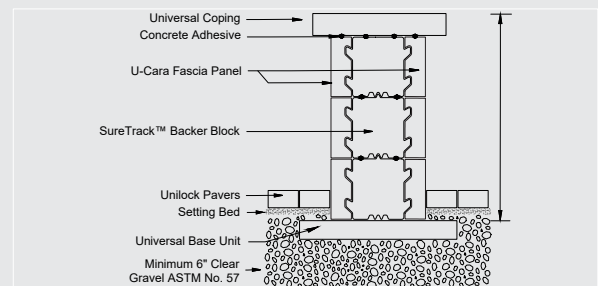

Notes:
This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

U-Cara® Multi-Face Wall System

		LARGE BACKER	STANDARD BACKER
Bundle Type		SINGLE	SINGLE
Plant Produced		MICHIGAN	MICHIGAN
Thickness (mm)		150 MM	150 MM

FCFT PER	Bundle	15.82	33.91
	Layer	3.96	11.30
	Stone	0.28	0.32

PER BUNDLE	Layers	4.00	3.00
	Sections	-	-

LNFT PER	Bundle	-	69.99
	Unit	-	0.67

UNITS PER	SqFt	3.54	3.10
	Section	-	-
	Bundle	56.00	105.00

LBS PER	Layer	503	812
	Section	-	-
	Bundle	2,012	2,437

COMPONENTS		Stock	Stock
Large Backer		✓	-
Standard Backer		-	✓

Notes: Sold in full pallets only on a refundable, optional skid. All measurements are nominal. Contact Unilock for more information.

Components



**SURE TRACK
LARGE BACKER**
6 x 7½ x 12"
150 x 190 x 300mm



**SURE TRACK
STANDARD BACKER**
6 x 8 x 6"
150 x 200 x 150mm

Umbiano Panels



FRENCH GREY



SUMMER WHEAT



WINTER MARVEL



MIDNIGHT SKY

Smooth Panel



GRANITE



FOSSIL



NATURAL



SIERRA



DARK CHARCOAL

Pitched Panel



GRANITE FUSION



SIERRA



FOSSIL



NATURAL

Series 3" Panel



ONYX BLACK

Recommended Base Unit



UNIVERSAL BASE UNIT
14 x 19 x 2"
355 x 482 x 55mm

Please go to page 65 for more Universal product information.

Extra Components




**SURE TRACK
CORNER INSERT**
L = 2"
50mm
40pcs/bag

U-Cara® Modular System

The U-Cara Modular System offers a variety of aluminum frames that can be mixed and matched to construct vertical features like grill islands. Speak to your contractor to select a design and a U-Cara fascia panel finish to suit your project.

With the U-Cara Modular System you can build Grill Islands, Bars, Back splashes, Fire Places and Pillars.

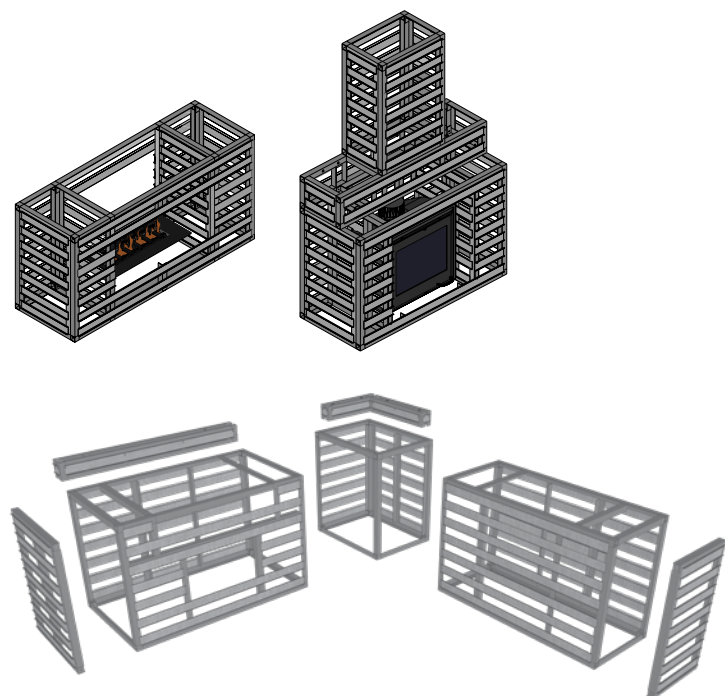

NO.	MODEL	DESCRIPTION
UCARA000001	URS	UCARA 8' RAIL (10/PACK)
UCARA000003	URS	ALIGNMENT BARS 39" (10/PACK)
UCARA001000	UL-GC	UNIVERSAL GRILL CABINET (fits 36-42" grill)
UCARA002000	UL-BC	BASE CABINET (fits fire table or fridge)
UCARA003000	UL-CC	CORNER CABINET 27.5" x 27.5"
UCARA003001	UL-CC-OS	CORNER CABINET 27.5" x 36.5" OS
UCARA003002	UL-CC-BP	CORNER CABINET BACK PANEL
UCARA004000	UL-ECK	END CLAD KIT 27.5"
UCARA004001	UL-ECK-OS	END CLAD KIT 36.5" OS
UCARA005000	UL-BS	BACKSPLASH-GRILL/BASE UNIT 64½"
UCARA005001	UL-CC-BS	BACKSPLASH CORNER CABINET
UCARA005002	UL-CC-BS-OS	BACKSPLASH CORNER CABINET OS
UCARA006000	UL-DD	STAINLESS DOUBLE ACCESS DOORS 27"
UCARA007000	UL-PU	PILLAR UNIT (18 ⅝" x 18 ⅝")



Download the U-Cara Modular Fireplace Installation Guide.

U-Cara® Wall Mount System



The U-Cara Wall Mount System allows you to put the finishing touches on your project by cladding existing structures like unsightly exposed foundation areas or concrete steps with U-Cara fascia panels.



U-CARA ALIGNMENT BAR:
39" LENGTH - SOLD IN PACKS OF 10 PIECES

U-CARA RAILS:
8' LENGTH - SOLD IN PACKS OF 10 PIECES



U-Cara® Wall Mount System INSTALLATION

Alignment Bar

- 38-5/8" tall (up to 7 courses of 6" fascia panels)
- Pre-punched to accommodate both 3" & 6" panels
- Eliminates the need to measure for rail spacing
- Speeds up installation
- 10 per bundle



Horizontal Rail

- 8' long with pre-punched holes every 8"
- Heavy duty galvanized steel
- 10 per bundle




U-Cara Fascia Panels

- EnduraColor Technology
- Available in 4 different finishes and several colors
- Apply adhesive and hang on wall mount system



Wood Substrate Application

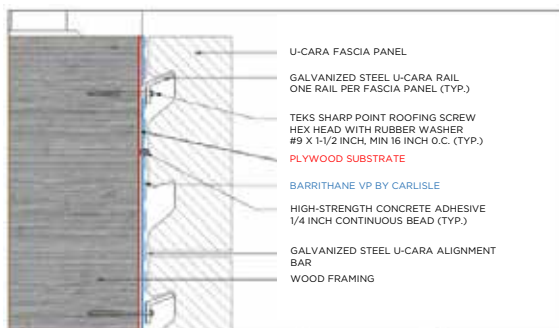

Barrithane VP


- Damp surface tolerant
- Immediately rain resistant
- Single coat application
- Apply as low as 15° F



Sharp Point Roofing Screw #12 x 1-1/2"

- Hex head
- Rubber washer
- Corrosion resistant coating


Concrete Substrate Application

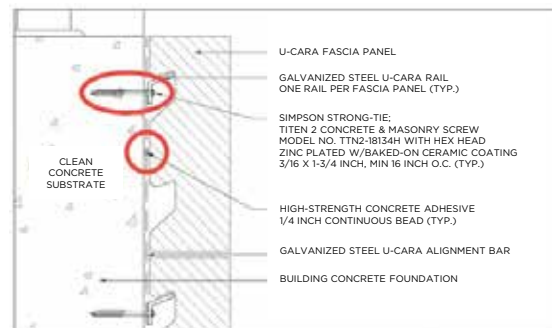

Titen 2 Hex Head 3/16" x 1-3/4"


- Improved thread design
- Increased load capacity
- Reduced snapping
- 450+ pound tension load
- 275+ pound shear load

U-Cara® Wall Mount System INSTALLATION

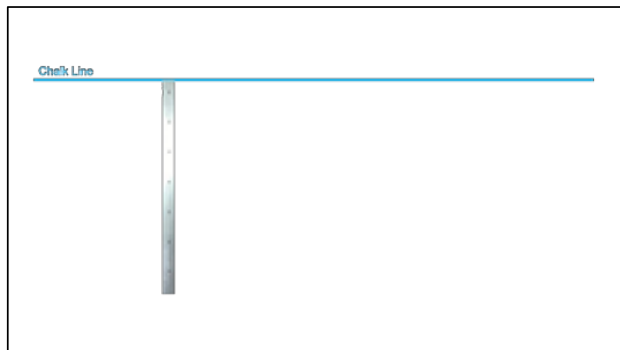


Step 1: Determine finished top height, mark with chalk line. Align orange painted end of alignment bar with chalk line.

Alignment bars should be placed 16" in from end of horizontal rail, and every 32".

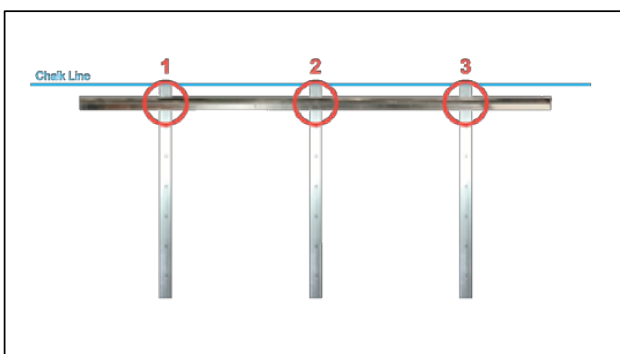


Step 2: Fasten both horizontal rail and alignment bars to substrate at points 1, 2, and 3; ensuring the rail is level.

The first four screws are the most important, as they will establish your grid pattern for all your horizontal rails in this section.

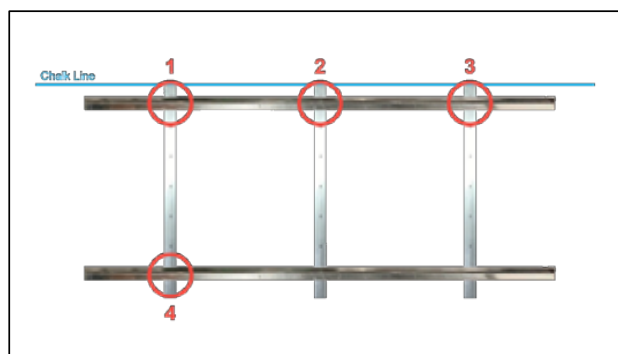


Step 3: Fasten the bottom horizontal rail and alignment bar at point 4; use a level or a square to ensure alignment bar is plumb

You have now established your grid pattern for the rest of your horizontal rails in this section.

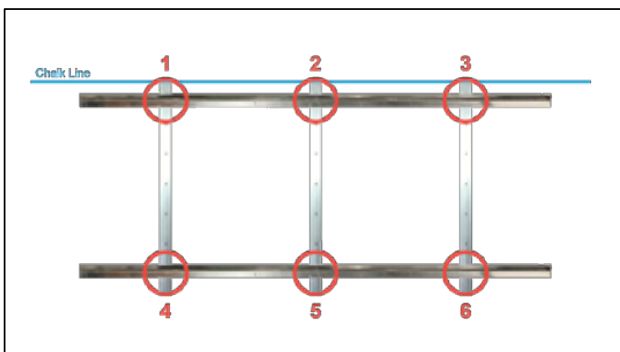

Step 4: Fasten the bottom horizontal rail and alignment bars at points 5 and 6.

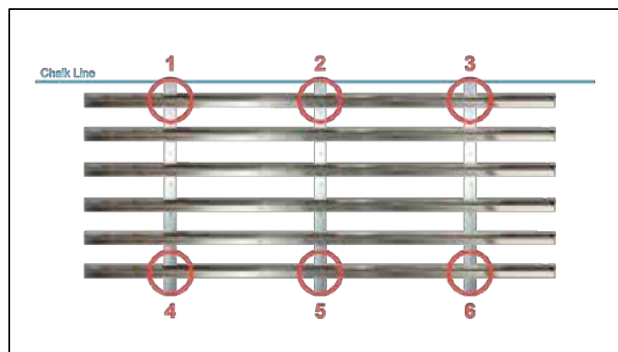

Step 5: Fasten remaining horizontal rails.

All horizontal rail should be fastened to substrate every 16" and on both ends.

Architectural Cap & Coping

ENDURACOLOR™



APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Exposed
Joint Spacing - n/a

TECHNOLOGIES

ENDURACOLOR™
Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

	COPING ENDURACOLOR	PILLAR CAP 28" ENDURACOLOR
Bundle Type	SINGLE	SINGLE
Plant Produced		
Thickness (mm)	60 MM	76 MM

SQFT PER	Bundle	-	-
	Unit	-	-

FCFT PER	Bundle	-	-
	Layer	-	-
	Unit	-	-

LNFT PER	Bundle	42.00	-
	Unit	2.00	-

UNITS PER	Bundle	21.00	6.00
	SqFt	-	-

LBS PER	Unit	68	183
	Bundle	1,428	1,098

COLORS		Stock	Stock
Buff	SR n/a SRI n/a	✓	✓
Charcoal	SR n/a SRI n/a	✓	✓



BUFF



CHARCOAL

Single Units



COPING
609 x 60mm x 355mm
24 x 2 3/8 x 14"
21 units/Bundle



PILLAR CAP
711 x 711mm x 76mm
28 x 28 x 3"
6 units/Bundle

Notes: **COPING SOLD IN FULL PALLETS ONLY** and is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail – Zero
Surface Texture – Textured
Joint Spacing – 2mm

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

	FULLNOSE CLASSIC ANTIQUED
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	70 MM

FCFT PER	Bundle	-
	Layer	-
	Stone	-

PER BUNDLE	Layers	8.00
	Sections	4.00

LNFT PER	Bundle	96.00
	Unit	0.50

UNITS PER	SqFt	-
	Section	48.00
	Bundle	192.00

LBS PER	Layer	364
	Section	728
	Bundle	2,913

COLORS		Stock
Dark Charcoal	SR. n/a SRI n/a	✓
Coffee Creek	SR. n/a SRI n/a	✓
Limestone	SR. n/a SRI n/a	✓
Mahogany Ash	SR. n/a SRI n/a	✓
Sandstone	SR. .41 SRI 46	✓



DARK CHARCOAL




COFFEE CREEK



LIMESTONE



MAHOGANY ASH



SANDSTONE

Single Unit



BRUSSELS FULLNOSE
150 x 300 x 70mm
5 7/8 x 11 7/8 x 2 3/4"
192 units/Bundle

Notes: **SOLD IN FULL PALLETS ONLY.** Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.

Universal Coping & Base

CLASSIC / ENDURACOLOR™



APPLICATIONS



APPEARANCE

Edge Detail - n/a

Surface Texture - Standard / Smooth

TECHNOLOGIES

CLASSIC™ (Base)

Budget-friendly traditional product mix

ENDURACOLOR™ (Coping)

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	UNIVERSAL BASE CLASSIC	UNIVERSAL COPING SMOOTH ENDURACOLOR
Bundle Type	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN
Thickness (mm)	55 MM	70 MM

FCFT PER	Bundle	-	17.44
	Layer	-	2.18
	Stone	-	0.36


PER BUNDLE	Layers	9.00	8.00
	Sections	-	-

LNFT PER	Bundle	85.50	75.90
	Unit	1.58	1.58

UNITS PER	SqFt	-	2.75
	Section	-	-
	Bundle	54.00	48.00

LBS PER	Layer	278	358
	Section	-	-
	Bundle	2,502	2,864

COLORS		Stock	Stock
Charcoal (EC)	SR.n/a SRI n/a	-	✓
Natural (Classic & EC)	SR.n/a SRI n/a	✓	✓
Sandstone (EC)	SR.n/a SRI n/a	-	✓



CHARCOAL



NATURAL



SANDSTONE

Single Units



UNIVERSAL COPING

482 x 70 x 355mm
19 x 2 ¾ x 14"
48 units/Bundle
.36 Fc.Ft./Stone



UNIVERSAL BASE

482 x 55 x 355mm
19 x 2 ¼ x 14"
54 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is shipped on an optional, refundable skid. Two (2) End Coping units per Layer (1 Left & 1 Right). All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Textured

TECHNOLOGIES

REALA™
Cast from natural stone

TECHNICAL INFORMATION

Conforms to ASTM C 1776
Eligible for LEED v4.1 credits

	FULLNOSE COPING	STANDARD COPING	STANDARD CLOSED-END	LARGE COPING	LARGE CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	60 MM	70 MM	70 MM	70 MM	70 MM

FCFT PER	Bundle	5.12	5.52	5.52	6.87	6.87
	Layer	0.39	1.38	1.38	1.72	1.72
	Stone	0.39	0.46	0.46	0.57	0.57

PER BUNDLE	Layers	13.00	4.00	4.00	4.00	4.00
	Sections	-	-	-	-	-

LNFT PER	Bundle	26.00	24.00	24.00	30.00	30.00
	Unit	2.00	2.00	2.00	2.50	2.50

UNITS PER	SqFt	2.54	2.18	2.18	1.75	1.75
	Section	-	-	-	-	-
	Bundle	13.00	12.00	12.00	12.00	12.00

LBS PER	Layer	56	193	199	282	279
	Section	-	-	-	-	-
	Bundle	723	772	796	1,128	1,116






COLORS		Stock	Stock	Stock	Stock	Stock
Buff	SR.n/a SRI n/a	✓	✓	✓	✓	✓
Grey	SR.n/a SRI n/a	✓	✓	✓	✓	✓



BUFF



GREY

Single Units					
	FULLNOSE COPING	STANDARD COPING	STANDARD CLOSED-END COPING	LARGE COPING	LARGE CLOSED-END COPING
	610 x 305 x 60mm	610 x 305 x 70mm	610 x 305 x 70mm	762 x 343 x 70mm	762 x 343 x 70mm
	24 x 12 x 2 3/8"	24 x 12 x 2 3/4"	24 x 12 x 2 3/4"	30 x 13 1/2 x 2 3/4"	30 x 13 1/2 x 2 3/4"
	13 unit/Bundle	12 unit/Bundle	12 unit/Bundle	12 unit/Bundle	12 unit/Bundle
	.39 Fc.Ft./Stone	.46 Fc.Ft./Stone	.46 Fc.Ft./Stone	.57 Fc.Ft./Stone	.57 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping and steps are rock faced on three sides. Fullnose is rounded only on one side, no Closed-end available. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a

Surface Texture - Textured

TECHNOLOGIES

REALA™

Cast from natural stone

TECHNICAL INFORMATION

Conforms to ASTM C 1776

Eligible for LEED v4.1 credits

	48" STEP	24" PILLAR CAP
Bundle Type	SINGLE	SINGLE
Plant Produced	GEORGETOWN	CHICAGO
Thickness (mm)	150 MM	100 MM

FCFT PER	Bundle	5.91	3.28
	Layer	1.97	0.66
	Stone	1.97	0.66

PER BUNDLE	Layers	3.00	5.00
	Sections	-	-

LNFT PER	Bundle	12.00	10.04
	Unit	4.00	2.01

UNITS PER	SqFt	0.51	1.52
	Section	-	-
	Bundle	3.00	5.00

LBS PER	Layer	574	159
	Section	-	-
	Bundle	1,721	795

COLORS		Stock	Stock
Buff	SR.n/a SRI n/a	✓	✓
Grey	SR.n/a SRI n/a	✓	✓



BUFF



GREY

Single Units



48" STEP
1220 x 610 x 150mm
48 x 24 x 5 7/8"
3 unit/Bundle
1.97 Fc.Ft./Stone



24" PILLAR CAP
610 x 610 x 100mm
24 x 24 x 3 7/8"
5 unit/Bundle
.66 Fc.Ft./Stone

Notes: **SOLD BY BUNDLE OR PIECE.** Produced and sold on a required, refundable skid. Step is rock-faced on one side, while the Pillar Caps are rock-faced on four sides. All measurements are nominal. Contact Unilock for more information.

Sunset Fire Pit Kit

CLASSIC



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Standard / Tumbled
Joint Spacing - n/a
Void % - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	ROUND
Bundle Type	SINGLE
Dimension Metric	1300 x 1300 x 300mm
Dimension Imperial	51 1/4 x 51 1/4 x 11 7/8"
Thickness (mm)	300 MM

DIAMETER (inch)	Outside	52.00
	Inside	36.00
	Insert	34.00

LAYER PER UNIT	3.00
UNIT PER LAYER	20.00
UNIT PER PALLET	60.00

LBS PER PALLET	1,125
----------------	-------

COLORS		Stock
Coffee Creek	SR. n/a SRI n/a	✓
Limestone	SR. n/a SRI n/a	✓
Mahogany Ash	SR. n/a SRI n/a	✓
Sandstone	SR n/a SRI n/a	✓

FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.



COFFEE CREEK



LIMESTONE



MAHOGANY ASH



SANDSTONE

Single Unit



SUNSET ROUND W/INSERT

1300 x 1300 x 300mm
51 1/4 x 51 1/4 x 11 7/8"

FIRE PIT INSERTS SOLD SEPARATELY

Notes: All measurements are nominal. Contact Unilock for more information.

Base Thickness Chart (General)

APPLICATION	GRAVEL BASE	BEDDING COURSE	BACKFILL WIDTH (WALLS ONLY)
PATIOS, WALKWAYS, POOL DECKS	4" - 6" (10cm - 15cm)	1" (2.5cm)	
DRIVEWAYS	8" - 12" (20cm - 30cm)	1" (2.5cm)	
STEPS, PLANTERS, RAISED PATIOS	6" (15cm)	0 - 1/8" (0cm - .3cm)	8" - 12" (20cm - 30cm)
RETAINING WALLS UNDER 18" (45cm)	6" (15cm)	0 - 1/8" (0cm - .3cm)	12" (30cm)
RETAINING WALLS OVER 18" (45cm)	6" (15cm)	0 - 1/8" (0cm - .3cm)	16" (50cm)

Soil condition - In areas with poor soil conditions, (e.g., heavy clay, disturbed soils) increase the depth of the base to provide more stability. Where poor soil conditions exist, it may be advisable to contract an engineer when constructing a retaining wall in excess of 24" in height.

Area = (Length) x (Width)

Area of a Circle = $3.14 \times (\text{Radius}) \times (\text{Radius})$

Area of a Half Circle = $1.57 \times (\text{Radius}) \times (\text{Radius})$

Area of a Quarter Circle = $.78 \times (\text{Radius}) \times (\text{Radius})$

Area of a Triangle = $(1/2 \text{ Base}) \times (\text{Height})$

Perimeter of a Circle = $6.28 \times (\text{Radius})$

Perimeter of a Half Circle = $3.14 \times (\text{Radius})$

Perimeter of a Quarter Circle = $1.57 \times (\text{Radius})$

Metric Equivalents

1 inch = 2.5400 centimeters

1 foot = 0.3048 meter

1 yard = 0.9144 meter

1 sq. foot = 929.030 sq. centimeters

1 sq. meter = 1.196 sq. yards

27 cu feet = 1 cu. yard

1 centimeter = 0.3937 inch

1 meter = 39.3701 inches

Large Equipment

UniLyft™



Model L



Model Mini P



Model PM

- Install up to 700 sq. ft. per hour!
- Access tight or narrow areas
- Eliminate the need for a forklift on site
- Reduce labor costs
- Reduce shoulder, hand & knee pain and injury
- Improve your bottom line

Contact your local rep for details.

VPR 700 Paver Roller

- Centrifugal Force: 3,147 lbs
- Machine Weight: 386 lbs
- Base Plate Width: 26"
- Engine: Honda GX160 Four-Stroke



VPR 450 Paver Roller

- Centrifugal Force: 1,798 lbs
- Machine Weight: 238 lbs
- Base Plate Width: 16.5"
- Engine: Honda GX160 Four-Stroke



U-LEVEL™

- Easy to use
- Accurate readings
- Low maintenance
- Works in difficult locations
- Large working area

A PRECISION TOOL NO
HARDSCAPER SHOULD BE WITHOUT



Unilock Elements

Tuscany Collection



TUSCANY FIREPLACE SPECIAL ORDER
Sandstone with Copthorne® (3 Color Blend)



TUSCANY FIREPLACE
Sierra with Copthorne® (3 Color Blend)

WEIGHTS

Tuscany Collection

Fireplace Top — 2,925 lbs
Fireplace Bottom — 4,225 lbs
Wood Boxes — 4,005 lbs
Arched Hearth — 1,170 lbs

Barcelona Collection SPECIAL ORDER



BARCELONA FIREPLACE
Sierra with Umbriano® (Summer Wheat)

WEIGHTS:

Barcelona Collection

Fireplace Top — 2,725 lbs
Fireplace Bottom — 4,170 lbs
Wood Boxes — 4,200 lbs
Arched Hearth — 1,200 lbs



TUSCANY / BARCELONA GRILL ISLAND SPECIAL ORDER

Available with OCS Grill, protective cover and stainless steel double door insert.




MODA SPECIAL ORDER

WEIGHTS

Moda Base — 3,550 lbs
Moda Top — 1,915 lbs


The Moda pre-built fireplace is constructed from Lineo Dimensional Stone and Series™ accent.

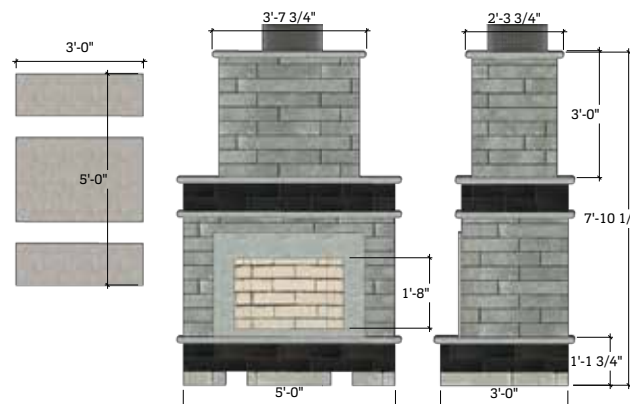



Note: Items shown are Tuscany units. Please contact Unilock for more information on special order items. Units and measurements may not be exactly as shown.

Unilock Elements

TYPICAL CROSS SECTION FOR CONCRETE PAD INSTALLATION

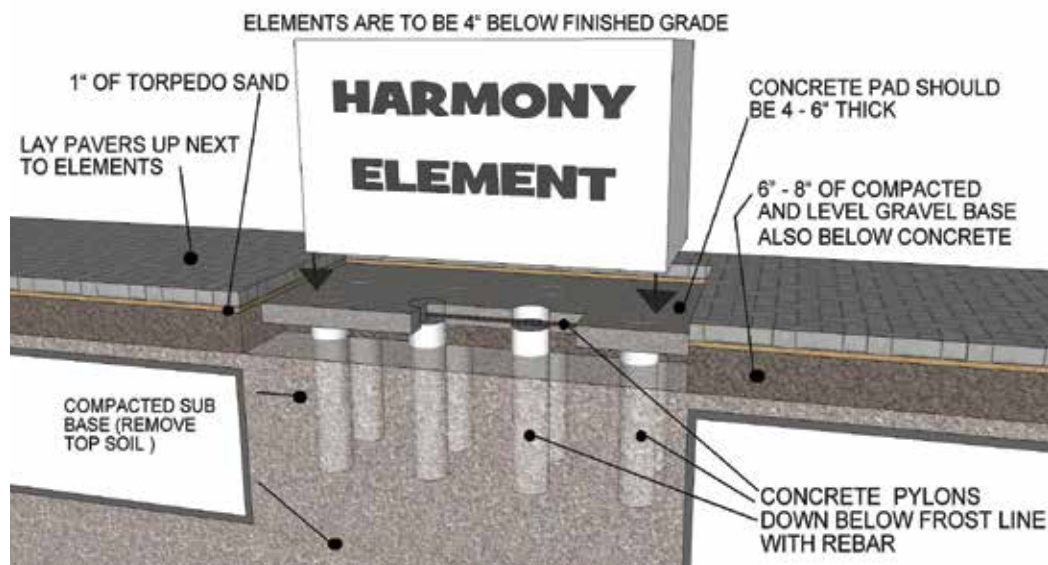

TUSCANY & BARCELONA FIREPLACE

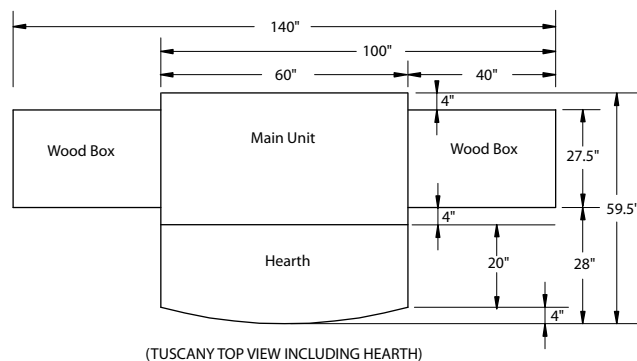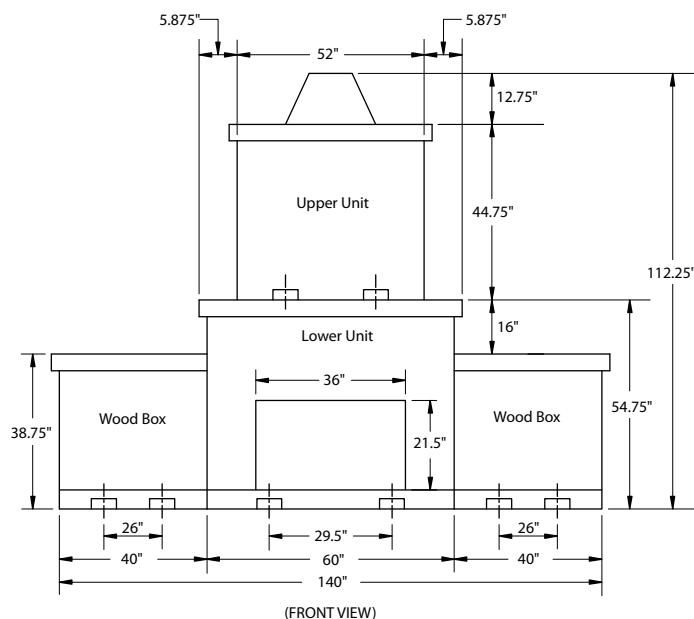

GUARANTEE

The standard Unilock guarantee applies to the units used to construct Unilock Elements. (See Unilock literature for details.) Third party grills and fireboxes carry their respective manufacturer's warranty, and may change without notice.

Note: Unilock reserves the right to change model designs, accessories and colors without notice. Unilock will not be responsible for improper use or handling that results in property damage. Some models may not be exactly as shown. Fireplaces come complete with UL- approved stainless steel fireboxes. Check local building codes and regulations prior to ordering and installing Unilock Elements.

Paver Cleaners



POLYBIND™ SHAMPOO

CLN047 (1 Gallon) 1 & 5 Gallon available 1 US Gal/Box
Polybind Shampoo removes ground-in dirt from the surface of concrete pavers and natural stones and makes your patio, walkway, driveway, etc. look clean and vibrant. Use it before sealer application to assure you of a deeper penetration into the cleaned surface. No muriatic acid in product – washes off with water. Note: **5 Gallon is SPECIAL ORDER**



POLYBIND OIL & GREASE CLEANER

CLN050 (1 Quart) 1 Quart Container (6/box)
Polybind Oil & Grease Cleaner is effective in removing oil and grease from the surface of concrete pavers and natural stones. Easy to use – dissolves, dislodges and removes oil and grease. No hydrochloric acid in product – washes off with water.



POLYBIND EFFLORESCENCE CLEANER

CLN045 (1 Gallon) & CLN046 (5 Gallon **SPECIAL ORDER**)
Polybind Efflorescence Remover will remove any efflorescence stains trapped in the concrete paver and natural stone pores. It will make the pavers look more clean and vibrant. This efflorescence cleaning is a necessary step before a sealer is applied. The sealer will be able to get a deeper penetration into the now-clean pores.



POLYBIND RUST REMOVER

CLN051 (1 Quart) (6/box)
Polybind Rust Cleaner is effective in removing rust from the surface of concrete pavers. Contains no muriatic acid.



POLYBIND RUBBER, PAINT & TAR REMOVER

CLN049 (1 Quart) (6/box)
Polybind Rubber, Paint & Tar Remover is effective in removing rubber, paint and tar from the surface of concrete pavers and natural stone. Easily washes off with water and is easy to use.



POLYBIND SEALER STRIPPER

CLN068 (1 gallon) & CLN069 (5 gallon)
(Box of 4 x 1 US gallon)
Polybind Sealer Stripper is extremely effective for removing either water-based or solvent-based sealers from concrete pavers or stone. It is environmentally responsible (water-based), yet it removes multiple layers in a single application. It is a paste which is easily applied with a brush or roller.

Natural Stone Cleaners (continued)



UNICARE BIOERASE / BIOCLEAN

CLN097 (1L) & CLN100 (5L)
Removal of:
• Black spot algae • Green algae • Plant stains from leaves, wood, trees, berries & flowers
• Organic staining from bark & compost • Colored stains from food spillages, tea, coffee and wine

Natural Stone Sealers



UNICARE NATURAL MATTE SEALER

SEAL229 (1L) & SEAL231 (5L)
For Porous Stones
• No change of color • No surface coating, sheen or shine at all • Riven Sandstone & Smooth Sandstone
Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.



UNICARE NATURAL COLOUR ENHANCER SEALER

SEAL230 (1L) & SEAL232 (5L)
For Porous Stones
• No change of color • No surface coating, sheen or shine at all • Riven Sandstone & Smooth Sandstone
Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.

Sealers



POLYBIND™ HIGH GLOSS SEALER (BLUE)

SEAL145 (1 gallon) & SEAL146 (5 gallon)
1 & 5 Gallon Available Box of 4 x 1 US gallon
This water based sealer offers a high-gloss finish for all concrete pavers that have never been sealed or pre-sealed in the manufacturing process.



POLYBIND™ WET LOOK SEALER SB

SEAL143 (1 gallon) & SEAL144 (5 gallon)
1 & 5 Gallon Available Box of 4 x 1 US gallon
This wet look sealer made from acrylic-based polymers penetrates deep into the concrete paver and natural stone pores, thus reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt



POLYBIND™ ECO SEAL LOW GLOSS

SEAL147 (1 gallon) & SEAL148 (5 gallon)
Box of 4 x 1 US gallon
Polybind Eco Seal Low Gloss is 100% pure, high-grade acrylic used to seal concrete pavers, clay pavers and natural stone. It penetrates deep into the pavers and natural stone pores, thus reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt.



POLYBIND ECO SEAL HIGH GLOSS SEALER + COLOR ENHANCER WB

SEAL185 (1 gallon) & SEAL186 (5 gallon)
1 & 5 Gallon Available Box of 4 x 1 US gallon
This high gloss sealer is 100% pure, high-grade acrylic used to seal concrete & clay pavers and natural stone, by penetrating deep into their pores, thus reducing oil and dirt penetration as well as protecting them from the corrosion of de-icing salt. It provides a high-gloss finish as well as vibrant color enhancement.

Natural Stone Cleaners



UNICARE POWERASE / POWER CLEAN

RS-CLN096 (1L) & RS-CLN099 (5L)
• Oil & Grease • Food Stains • General Dirt & Mud • Light cement contamination
• Sap & certain plant stains sensitive surfaces

Sealers (continued)



POLYBIND ECO SEAL LOW GLOSS SEALER + COLOR ENHANCER WB

SEAL178 (1 gallon) & SEAL179 (5 gallon)
1 & 5 Gallon Available Box of 4 x 1 Us gallon
Polybind Eco Low Gloss Sealer + Color Enhancer is 100% pure high-grade acrylic for concrete pavers. It penetrates deep into the concrete paver pores, reducing oil and dirt penetration as well as corrosion from de-icing salt.



POLYBIND RESEALER SB

SEAL155 (1 gallon) & SEAL156 (5 gallon)
1 & 5 Gallon Available Box of 4 x 1 Us gallon
Polybind Resealer penetrates the existing sealer and reactivates it to create rejuvenated protection of the paver surface, thus reducing oil and dirt penetration as well as protecting it from the corrosion of de-icing salt.

Adhesives



SUREBOND SB-10 ADHESIVE

ADH002 28oz tube; 12/case; 60 cases/skid
(Conforms to UN-STD. 1804, ASTM 2339-70& FHA UM-60)
Surebond SB-10 adhesive is a fast set-up, quick curing, superior strength, structural grade hardscape adhesive. Adheres well in extreme conditions such as temperatures ranging from 0° to 100° F, frozen and/or damp substrates.
Light Tan • Low odor • VOC compliant • 900 psi



POLYBIND XTRA PERFORMANCE (XP) POLYURETHANE ADHESIVE

ADH035 (10 oz) & ADH038 (28 oz)
10 oz. Tube = 20' at 1/4" bead & 28 oz. Tube = 52' at 1/4" bead
Formulated for fast cure time, extra bond strength and durability. Applications include concrete pavers and walls, overlays, pool copings, steps & wall caps, wetcast and natural stones and can be applied above 32° & on either dry or damp surfaces. Drying times vary depending on factors such as humidity, porosity, temperature and materials bonded together.



TECHNISEAL STRUCTURE BOND™ FOAM ADHESIVE

ADH048 (24 oz)
24 oz. Canister = 600 linear feet at 3/8" bead (12/case)
An innovative super-strength foam adhesive that bonds a wide range of construction products with an application time up to 50% faster than with conventional tube adhesives. Materials are bonded in just 8 minutes and adhesive is fully cured within 24 hours. Made from high-quality modified polyurethanes with excellent long-term resistance to weathering, dilute acids and caustic solutions.



TECHNISEAL STRUCTURE BOND™ GUN II

TOOL378 1 Dispenser (12/case)
The Gun II dispenser for application enables you to gain access to hard-to-reach areas and greatly limits excessive spillage or dripping, while also reducing user-fatigue, with total control on product flow. The gun allows for a precise adhesive delivery with a single pull of the trigger that stops as soon as you let go. Requires no pumping, cutting or puncturing of cartridge nozzles.

Adhesives (continued)



TECHNISEAL STRUCTURE BOND™ FOAM CLEANER

CLN093 (16 oz) 1 Canister = (12/case)
Structure Bond Gun Cleaner is a powerful cleansing formula that rapidly dissolves any uncured Structure Bond adhesive residue. Specifically designed to fit Structure Bond Gun II dispensers. Simply screw a canister onto the gun and press the trigger to cleanse the tool from uncured product. The built-in sprayer nozzle will dissolve any spill, drip or adhesive residue.

Sands



ALLIANCE GATOR NITRO SAND

SAND196 - Beige / SAND197 - Grey / SAND198 - Black
Packaging: • 50 lb/bucket • 48 buckets/skid
Coverage: 10-56sf = 50lb bucket depending on joint size
Ready-to-use mixture of calibrated sand and resins which cure when exposed to air, harden from top to bottom of the joint. Can be installed in wet or dry weather, in joints ranging from a minimum 3/16" (5mm) to a maximum 2" (50mm) joint width. The minimum jointing depth is 1" (25mm).



POLYBIND G2 COMPLETE SAND

SAND152 (Nevada Tan), SAND153 (Oxford Gray), SAND154 (Jet Black), SAND155 (Ivory White - **SPECIAL ORDER** - Full Skid Quantities Only)
50lb bag 56 bags/skid 65-85 sq.ft./bag for narrow joints
Designed for paver joints up to a maximum of 4 inches. Drainage & Non-Drainage Applications (Overlays). No Dust - No Haze - No Blower - One Watering.
This is the cleanest, fastest and easiest polymeric sand installed in the industry. It can be used with concrete pavers, wetcast & natural stones, and is recommended for use in patios, pool decks, walkways, driveways, etc.



SEK POLYSWEEP SAND

SAND045 - Tan, SAND046 - Gray & SAND147 - Platinum
50 lb/bag 56 bags/skid
For concrete paver, cast stone pavements, slabs and natural stone joints up to 3/4". PolySweep polymeric sand is a blend of native sands and high quality synthetic polymers specially formulated to allow the joints to expand and contract with elements such as extreme heat, extreme cold and freeze/thaw cycles.



SUREBOND JOINTING SAND

SAND001-1 (Tan) & SAND140 (Gray) 50lb bag 56 bags/skid
This jointing sand will properly complete the interlocking of the segmental pavers because it is clean, angular and meets ASTM-C144 specifications. This type of sand is more stable in the paver joints and has the optimal gradation to ensure long term performance of the pavement system. Recommended for joints up to 3/4" • Washed, screened & dried



EUROSTONE BOND

SAND097 - SLATE GREY 50lb. bag (56 bags/skid)
For Driveway Aprons Application & Cobblestone Joints up to 3.5cm / 1"
Eurostone Bond is the first polymeric sand specifically designed for drainage and non-drainage base systems and can be used with natural stones and cobblestone. Recommended for many uses, including streets, plazas (pedestrian and vehicular traffic) paths, sloping areas, around pools, etc. Sets above freezing (0°C / 32°F) and can be used for joints up to a maximum of 3.5 cm/ 1".

Sands continued

Sands	Polybind Complete G2 Sand
PAVERS \ FEATURES	For joints up to 4". May be sealed. Available in Tan, Gray or Black. Binding sand.
Copthorne®	✓
Courtstone®	✓
Il Campo®	N/R
Richcliff®	✓
Series™	N/R
Thornbury™	✓
Town Hall®	✓
Tribeca Cobble™	N/R
Umbriano®	✓
Natural Stone	✓
Tumbled Pavers	✓
Standard Pavers	✓

N/R - Not Recommended ü- Recommended

✓* - These pavers have a very narrow or slightly angled edge (chamfer) limiting sand penetration in the joint and causing possible weak bonding areas. The life cycle performance could be affected.

SUGGESTED POLYMERIC SAND COVERAGE BY PRODUCT

Product	Coverage per Bag
Anchorlock™	70-75 sf
Artline™	60-65 sf
Beacon Hill™	50-60 sf
Boulevard™	55-60 sf
Bristol Valley™	55-60 sf
Brussels Block®	80-85 sf
Copthorne®	50-60 sf
Courtstone®	30-40 sf
Granito™	50-60 sf
Hex Paver™	50-60 sf
Hollandstone™	70-75 sf
Holland Premier™	70-75 sf
Mattoni™	30 sf
Promenade™	20 sf
Richcliff®	45-50 sf
Series™	60-65 sf
Thornbury™	40-45 sf
Town Hall®	40-45 sf
Tribeca Cobble™	40-45 sf
Umbriano® 6cm Random	55-60 sf
Umbriano® 7cm	60-65 sf
Westport™	40-45 sf

Installation practices may affect the amount of sand used per product.

IMPORTANT NOTICE

1. **DO NOT USE** Polymeric Jointing Sand on the following products:

Series™ Il Campo® Tribeca Cobble™

If joint stabilization is required, use ordinary jointing sand and apply a stabilizing sealer. Contact your local Unilock office for recommended sealants and application specifics.

2. **EXTRA CARE** must be exercised when using Polymeric Sand on the following products:

Courtstone® Copthorne® Richcliff® Town Hall® Umbriano®

Polymeric Jointing Sand can be used on these products but the fine polymers and binders in Polymeric Jointing Sand have a natural tendency to adhere to the surface and therefore extra diligence must be taken to pre-clean the surface prior to "wetting the sand in" and squeegee off the surface post application. Failure to do so will result in a "whitish haze" on the surface that is difficult to remove.

3. **IMPORTANT COMPACTION NOTICE:** Always pre-compact the pavers WITHOUT SAND IN THE JOINTS. This will facilitate proper leveling. Polymeric Sand can then be swept into the joints. Always use a compactor with a protective membrane attached to the bottom of the plate.

Polymeric Jointing Sand, cleaners and sealers, must always be applied by a trained and experienced professional. Contact your local Unilock office for training and the most up-to-date best practices.

NOTICE: Unilock does not accept any responsibility for damage to the surface caused by the improper application and use of polymeric sand, sealers or cleaners. Unilock will not accept responsibility for alternate suppliers of polymeric sand, jointing sand, cleaners and sealers.

Edge Restraints


SNAPEDGE - One-Piece Edging That Does It All!

EDGE001


- Only one part required for straight runs or curved installations
- Built-in connector fastens one piece to the next - convenient 96" size, makes them easy to transport
- Unique 'Snip and Flex' feature speeds installations of curves and corners without pre-planning
- The open design allows a root system to grow through SnapEdge, further reinforcing the installation
- Engineered to provide a strong, easy-to-install edge restraint for concrete/clay pavers
- Nail hole bosses are full-length cylinders. Hammer blows will not fracture or force nail heads through edging

PRODUCT INFORMATION:


8' (96") length pcs.
 Sidewall: 1 7/8"
 Pieces per Pallet: 672 (5,376 In. ft.)
 Pieces per Bundle: 24 (192 In. ft.)
 Bundles per Pallet: 28
 Pallet Weight: 1395 lbs.
 Pallet Size: 98" l x 48" w x 50" h




TIPS FOR QUICK AND EASY INSTALLATION WITHOUT PRE-PLANNING




Sharp Inside Corner




Sharp Outside Corner




Proper Wall Installation



Gentle Outside Curves



Gentle Inside Curves



Pieces Snap Together

POLYBIND EDGE EDGING

EDGE056 - Rigid / EDGE061 - Tile Edge

- Rigid has Twist & Lock connection system
- Rigid can be changed to a partial flex by cutting the bridge support
- Tile Edge provides stability and strong lateral support for all porcelain tile installations



RIGID EDGE

Product Information:
 8' (96") length pcs.
 Sidewall: 1 3/4"
 Pieces per Bundle: 24 (192 In. ft.)
 Pieces per Pallet: 672 (5376 In. ft.)



TILE EDGE:

Product Information:
 8' (96") length pcs.
 Sidewall: 5/8"
 Pieces per Bundle: 24 (192 In. ft.)
 Pieces per Pallet: 384 (3072 In. ft.)

SNAPEDGE PERMEABLE PAVER EDGING

EDGE033

- Designed specifically for permeable pavement with open-graded base material.
- Holds pavement edges securely in place.
- Does straight and curved edges.



PRODUCT INFORMATION:

8' (96") length pcs.
 Weight per Unit: 2.5 lbs.
 Pieces per Pallet: 64 (72 In. ft.)
 Freight Class: 300
 Pallet Weight: 210 lbs.
 Pallet Size: 98" l x 48" w x 50" h

PERMA EDGE PAVER EDGING


EDGE074 5 Gallon, 75 lb container

- Designed to float and flex with the sub base and not work independently like standard edging and spikes
- Quick & easy to install, typically cutting edging install time down by 80%
- Stays under the soil/mulch grade invisible edging
- Combats the freeze/thaw cycles in cold weather; won't deteriorate in moist/humid conditions
- Coverage per container; yields approx. 25-30 linear feet of edging per bucket



X & T Slab Spacers

Unilock recommends using slab spacers when installing Arcana or Soreno on an open grade surface. "T" spacers are needed for running bond patterns, "X" spacers are needed for stack bond patterns. Please contact your sales manager for more information.



TENSAR DRIVEGRID™ SYSTEM
FAB075

• 120' x 13.1' Roll - 1,572 sq. ft./56 lbs per roll

Drainage, Separation and Reinforcement



GATOR GRID 30-30

Gator Grid 30-30, a biaxial geogrid, provides strength, longevity, excellent stress transfer and prevents failure to the internal structure of landing areas, retaining walls and steep slopes. It has a high molecular weight as well as high-tenacity polyester yards which are woven in tension and finished with a PVC coating.

Packaging & Unilock SKU • 4' x 50' - FAB070 / 6' x 50' - FAB071 / 6' x 150' - FAB072



GATOR FABRIC NON-WOVEN 3.5

Gator Fabric Non-Woven 3.5 geotextile is ideal for drainage, filtration and will allow water flow in a paver or retaining wall application. It is designed for soil separation for added stability, has high strength and is dimensionally stable.

Packaging & Unilock SKU • 4' x 100' - FAB038 / 6' x 100' - FAB040



GATOR FABRIC NON-WOVEN 4.4

Gator Fabric Non-Woven 4.4 geotextile is ideal for drainage, filtration and will allow water flow in a paver or retaining wall application. It is designed for soil separation for added stability, has high strength and is dimensionally stable.

Packaging & Unilock SKU • 4' x 100' - FAB044 / 6' x 100' - FAB046



GATOR FABRIC WOVEN 5

Gator Fabric Woven 5 is a woven geotextile made from polypropylene yarns and can achieve higher tensile strength at low elongation. It is an excellent heavy-loading geotextile, ideal for driveways, alleyways, pathways and retaining walls.

Packaging & Unilock SKU • 4' x 100' - FAB049 / 6.25' x 300' - FAB052

Gator Base

FEATURES: For Pedestrian use only. Replaces concrete foundations and is used to replace 6" of crushed stone. The interlocking panels distribute all dynamic and static loads to a very wide area, practically eliminating any pressure on the ground.

GATOR Base is a unique evolution in base technology. Evacuates water through channels along a 1 slope.

Manufactured using lightweight high-density polypropylene. Environmentally friendly and 100% recyclable.

Extremely durable, will not degrade in the ground. Designed with LOCK-N-GO tongue and groove system. Packaging: 10 units per pack, 12 packs per box, 120 units per pallet SAND109



Gator Base Screws

GATOR BASE SCREWS

ACC225 - 1/4" - 1 box of 50


- Fastens Gator Edge to Gator Base
- Reinforces the outside perimeter, creating a strong lateral support



Base/Drainage Systems continued

GATOR TILE SYSTEM

Contact Unilock for more information.

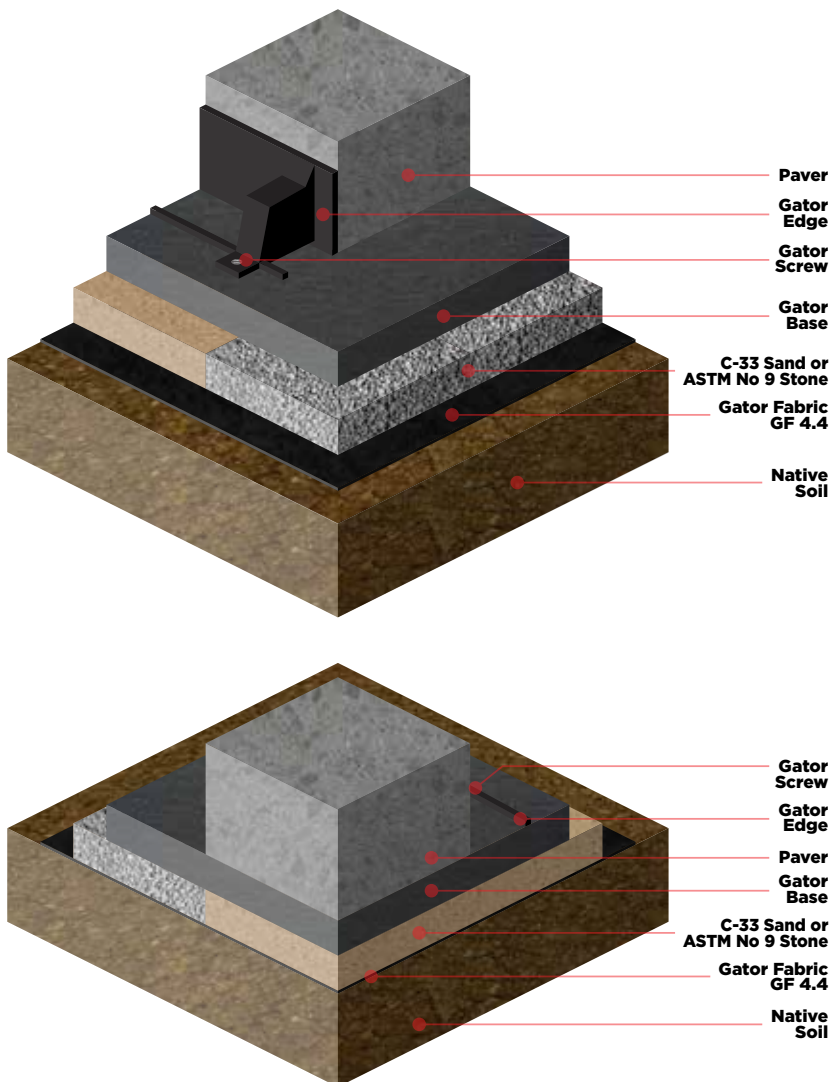

STEP 1 • EXCAVATION FOR THE GATOR BASE INSTALLATION

The total depth required will be determined by adding the thickness of the sand or chip setting bed (3/4" [19 mm]), GATOR BASE (3/4" [19 mm]), and thickness of the paver, slab, stone, or porcelain tile. Excavation depth is approximately 4" for a 2 3/8" [60 mm] concrete paver. Excavate 6" (15 cm) wider than the perimeter of the paved surface or 12" wider (30 cm) when building a seating wall or fire pit.

STEP 2 • LEVELING AND COMPACTING OF THE SOIL

The bottom of the excavated area should be uniform and smooth (+/- 3/8" [10 mm] in 10') and slope in the same direction as the finished paver surface. Compact the soil using a vibrating plate or hand tamper in confined areas.

STEP 3 • ADD GATOR FABRIC GF4.4 AND INSTALL SETTING BED

Cover the bottom and sides of the excavated area with Gator Fabric GF4.4. Spread an even layer of sand (ASTM C33 Concrete Sand) or chip (ASTM No. 9 Stone) in a 3/4" [19 mm] thick layer over the Gator Fabric GF4.4. No compaction is needed for the chip stone. However, the sand-setting bed should be compacted using a hand tamper or vibrating plate. It will help to moisten the sand before compaction. The surface should be smooth, the finished paver surface will mirror the grade set in this step.

STEP 4 • INSTALL THE GATOR BASE

Cover the area with the GATOR BASE panels, 6" (15 cm) wider than the finished paver edge or 12" (30 cm) for a seating wall or fire pit. Lay the GATOR BASE units in an alternating (staggered) pattern - if the Gator Faces line up, the interlocking edges will align perfectly. Gator Base can easily be cut to size using a utility knife.

STEP 5 • INSTALL PAVERS, BLOCKS, AND GATOR EDGE

Place the pavers or blocks directly on the GATOR BASE. Adding a 1/2" (13 mm) of bedding sand onto the surface of the GATOR BASE is also an accepted method for non-uniform thickness stone. Install the Gator Edge on the GATOR BASE, firmly against the pavers or blocks. Use a Gator Base Screw every second edging hole to maximize the lateral support provided by the Gator Edge.

STEP 6 • APPLY GATOR MAXX G2 TO PAVER JOINTS

Visit alliancegator.com/gator-base/ for more details and videos.

BEDDING MATERIALS CHART (Approximate Imperial Tons)

Bedding Course												
Square Feet	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
50	0.3	0.5	0.8	1.0	1.3	1.5	1.8	2.0	2.3	2.5	2.8	3.0
100	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0
150	0.8	1.5	2.3	3.0	3.8	4.5	5.3	6.0	6.8	7.5	8.3	9.0
200	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0
250	1.3	2.5	3.8	5.0	6.3	7.5	8.8	10.0	11.36	12.5	13.8	15.0
300	1.5	3.0	4.5	6.0	7.5	9.0	10.5	12.0	13.5	15.0	16.5	18.0
350	1.8	3.5	5.3	7.0	8.8	10.5	12.3	14.0	15.8	17.5	19.3	21.0
400	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.2	22.0	24.0
450	2.3	4.5	6.8	9.8	11.3	13.5	15.8	18.0	20.3	22.5	24.8	27.0
500	2.5	5.0	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0
550	2.8	5.5	8.3	11.0	13.8	16.5	19.3	22.0	24.8	27.5	30.3	33.0
600	3.0	6.0	9.0	12.0	15.0	18.0	21.0	24.0	27.0	30.0	33.0	36.0
650	3.3	6.5	9.8	13.0	16.3	19.5	22.8	26.0	29.3	32.5	35.8	39.0
700	3.5	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.0
750	3.8	7.5	11.36	15.0	18.8	22.5	26.3	30.0	33.8	37.5	41.3	45.0
800	4.0	8.0	12.0	16.0	20.0	24.0	28.0	32.0	36.0	40.0	44.0	48.0
850	4.3	8.5	12.8	17.0	21.3	25.5	29.8	34.0	38.3	42.5	46.8	51.0
900	4.5	9.0	13.5	18.0	22.5	27.0	31.5	36.0	40.5	45.0	49.5	54.0
950	4.8	9.5	14.3	19.0	23.8	28.5	33.3	38.0	42.8	47.5	52.3	57.0
1000	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0

BASE DEPTH CHARTS (Cubic Yards)

Bedding Course												
Square Feet	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
50	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.2	1.4	1.5	1.7	1.9
100	0.3	0.6	0.9	1.2	1.5	1.9	2.2	2.5	2.8	3.1	3.4	3.7
150	0.5	0.9	1.4	1.9	2.3	2.8	3.2	3.7	4.2	4.6	5.1	5.6
200	0.6	1.2	1.9	2.5	3.1	3.7	4.3	4.9	5.6	6.2	6.8	7.4
250	0.8	1.5	2.3	3.1	3.9	4.6	5.4	6.2	6.9	7.7	8.5	9.3
300	0.9	1.9	2.8	3.7	4.6	5.6	6.5	7.4	8.3	9.3	10.2	11.1
350	1.1	2.2	3.2	4.3	5.4	6.5	7.6	8.6	9.7	10.8	11.9	13.0
400	1.2	2.5	3.7	4.9	6.2	7.4	8.6	9.9	11.1	12.3	13.6	14.8
450	1.4	2.8	4.2	5.6	6.9	8.3	9.7	11.1	12.5	13.9	15.3	16.7
500	1.5	3.1	4.6	6.2	7.7	9.3	10.8	12.3	13.9	15.4	17.0	18.5
550	1.7	3.4	5.1	6.8	8.5	10.2	11.9	13.6	15.3	17.0	18.7	20.4
600	1.9	3.7	5.6	7.4	9.3	11.1	13.0	14.8	16.7	18.5	20.4	22.2
650	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.1	20.1	22.1	24.1
700	2.2	4.3	6.5	8.6	10.8	13.0	15.1	17.3	19.4	21.6	23.8	25.9
750	2.3	4.6	6.9	9.3	11.6	13.9	16.2	18.5	20.8	23.1	25.5	27.8
800	2.5	4.9	7.4	9.9	12.3	14.8	17.3	19.8	22.2	24.7	27.2	29.6
850	2.6	5.2	7.9	10.5	13.1	15.7	18.4	21.0	23.6	26.2	28.9	31.5
900	2.8	5.6	8.3	11.1	13.9	16.7	19.4	22.2	25.0	27.8	30.6	33.3
950	2.9	5.9	8.8	11.7	14.7	17.6	20.5	23.5	26.4	29.3	32.3	35.2
1000	3.1	6.2	9.3	12.3	15.4	18.5	21.6	24.7	27.8	30.9	34.0	37.0

Actual volume may vary due to type of materials, moisture content, and compaction. Calculation charts and formulas are provided as a service by Unilock for estimating material requirements. Unilock will not be held responsible in any way for resulting product overage or shortage.

IMPORTANT NOTES

UNILOCK PAVER PATTERNS

This Product Data Guide contains an extensive reference to patterns and designs. The purpose of these pattern swatches is to help the designer plan unique and exceptional designs. The percentages of products shown are based on the pattern and not on bundle configurations. In fact, there may be situations in which a pattern has been created with one particular size of stone, but that stone only comes packaged with two other sizes. This means that the designer will have to plan how the other components are used in the overall plan. This is usually accomplished by adding a border or an accent. As a result, overages or shortages may occur in certain patterns. The designer and/or installer of Unilock products accepts all responsibility for design and all associated costs incurred as a result of applying any of Unilock's suggested design patterns in a project. Please plan your project and review your order carefully prior to ordering.

TRANSFERABLE LIFETIME GUARANTEE

Unilock provides a Transferable Lifetime Guarantee* on the structural integrity of our paving stones, slabs and retaining wall units to the original purchaser of the product for residential use. Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Color matching cannot be guaranteed and replacement labor is not included. Proof of purchase is required.

Excessive defective material (over the industry accepted normal of 2% for non-tumbled unit pavers) delivered to the purchaser will be replaced free of charge if a written claim is made within 5 days of delivery from the manufacturer. Such claims will not constitute reason for delaying payment. All goods shall be deemed accepted if completely installed. Inspect concrete products prior to opening bundle packaging to ensure that shape and color are as ordered. Unsatisfactory material must be available for inspection by Unilock to entitle the purchaser to any adjustment or credit. Inspect all concrete units during installation and set aside any which are chipped or cracked to use for any cut pieces required. The color of concrete products may vary significantly between production lots. Always install concrete units from several bundles simultaneously to ensure proper distribution of color. Prior to final compaction, inspect installed pavers for good color distribution. Relocate certain pavers, if necessary, to achieve desired color blend.

*Transferable Lifetime Guarantee: Register your project within 60 days of your dated proof of purchase to ensure your Unilock Guarantee is fully transferable! Simply go online at unilock.com and follow instructions. Once processed, you will receive an original Transferable Warranty Certificate for your records.

PRODUCT HANDLING WARNING

Bundle Straps Under Tension - Use extreme caution when removing or handling straps. Always wear gloves, goggles, safety footwear, and protective clothing when removing or handling straps. Failure to do so may result in serious bodily injury or loss of sight.

Cut all concrete products only in well ventilated areas. Inhalation of dust is a serious health risk. A "NIOSH" (US) or a "CSA" (CDN) approved respirator, safety goggles, hearing protectors, and gloves must be worn at all times. Always "wet-cut" or "wet grind" concrete products to minimize dust.

Do not stack bundled concrete products higher than 2 bundles high. Contents of the bundle may be unstable and subject to topple when stacked. Always use extreme caution and appropriate equipment when transporting or storing bundled concrete products. Failure to do so may result in serious bodily injury or death. Always obey gross vehicle weight (GVW) loading limitations and regulations.

Hazard Rating: Fire 0, Health 1, Reactivity 0. See MSDS Concrete Masonry (Pavers). Contact Unilock for complete sheet or view safety information at Unilock.com.

Unilock assumes no liability or responsibility for loss or damage, resulting from the improper use or handling of our products, or from failure to follow instructions, warnings, and/or advisories on the product label, and on the MSDS sheet.

TRADEMARK & LEGAL INFORMATION

Umbriano® is a trademark of Metten Stein + Design GmbH & Co KG used under license by Unilock. Unilock Ltd. and Hengestone Holdings, Inc. are the owners or authorized users of all trademarks used in this publication unless otherwise specified.

Colors shown in this brochure should be used only as a guide. Colors should always be chosen from actual samples. Contact your local Unilock representative for color availability in your area. Not all products shown are available at all Unilock locations. Log on to www.unilock.com for availability. Measurements throughout this portfolio are nominal.

©2023 Hengestone Holdings, Inc.



QUALITY COMMITMENT

Unilock was the first concrete paver manufacturer in North America to offer a Lifetime Guarantee, and since then we have continued to stand behind it to ensure customers are completely satisfied with our products. With almost 2 billion stones in the ground, that's quite the commitment!

Our products are better and stronger than other brands. In fact, our internal standards of manufacturing in the USA and Canada far exceed industry standards set by ASTM (American Society for Testing and Materials) and CSA (Canadian Standards Association) and other European organizations.



LIFETIME GUARANTEE - RESIDENTIAL

Our Transferable Lifetime Guarantee warranties the structural integrity of Unilock concrete paving stones and retaining wall units when used in residential applications. It covers any structural failure or deterioration of the concrete unit resulting from normal use or from the reasonable application of sodium chloride (common rock salt used for de-icing). StoneMark™ products have the same warranties as Unilock paving stones and retaining walls, but cannot be warranted against damage resulting from de-icing products.

Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Proof of purchase is required. Customers are encouraged to submit receipts to us as soon as their project is complete, using the Unilock Warranty Registration Form on our website (Unilock.com).

Purchasers need to ensure that the product they purchase is appropriate for their intended application; for example, only certain thicknesses of products are appropriate for driveways. Color matching of the replacement product and/or lost time cannot be guaranteed and labor costs related to installing replacement product is not included. Unilock reserves the right to seek a professional diagnosis and opinion to determine the exact cause of the product failure. If the failure falls within our warranty parameters, Unilock will replace the defective product.

EXCLUSIONS – Unfortunately, some things are beyond the control of Unilock, and are therefore not covered by this warranty. These include: naturally occurring efflorescence, hazing from polymeric jointing sand, scratching and chipping resulting from snow removal or construction equipment, damage caused by natural or un-natural disasters, or negligence by anyone other than Unilock. While EasyClean helps to increase a paver's resistance to staining from various substances, it does not make our products stain-proof nor does it resist every kind of stain. The Unilock warranty also does

not cover deterioration or damage as a result of poor design or poor installation practices that are contrary to specifications as laid out by ICPI (Interlocking Concrete Pavement Institute) and the NCMA (National Concrete Masonry Association). For more information please visit www.icpi.org and www.ncma.org. Additionally, please refer to the Maintenance, Color and Installation Advisories.

MAINTENANCE ADVISORY

1. Cleaning and Sealing

As with anything that is outdoors, Unilock products are subject to harsh weather, dust, acid rain, leaf stains, water stains and general wear from foot or vehicular traffic. Therefore, periodic cleaning using environmentally safe detergents designed for cleaning concrete is recommended to maintain a bright, fresh appearance.

To make subsequent cleaning easier and more effective, a concrete sealer can be applied to new or cleaned products to help prevent the penetration of substances that can cause stains.

There are many types of concrete cleaners and sealers on the market. Always read the instructions carefully before using the product to make sure that it will function as expected. Testing first, in a small unobtrusive area, is always a good idea to ensure the results are acceptable. Consult your local hardscape dealer to find the products best suited for your paver or wall installation.



Visit Unilock.com to register for your Transferable Lifetime Guarantee.

2. Winter Maintenance

Snow removal by way of metal blades on plows or shovels will scratch and chip the surface of pavers, causing permanent damage. To mitigate this risk, metal snow clearing blades must always have a polyurethane or rubber cutting edge attached when plowing pavers.

De-icing Salts – The use of de-icing products on paver surfaces is important for safety and to help mitigate snow accumulation. Most de-icing products will have some effect on concrete, even if the product label indicates that it is safe on concrete. If you must use a de-icing product, we recommend that you use Sodium Chloride (ordinary rock salt) or Calcium Chloride (for colder climates). Always apply sparingly. The use of de-icing products on StoneMark, wet-cast pavers, slabs or coping may damage the product and therefore is not recommended. Whenever possible use a coarse sand as an anti-slip measure instead of de-icing chemicals.

COLOR ADVISORY

1. Selection

Due to the inherently variable nature of printed materials and digital monitors, Unilock cannot guarantee that products will match the color of printed or online images. Therefore, when making final product selections, decisions should be made based on actual stones which are readily available from Unilock, Authorized Contractors or Authorized Dealers. Most Unilock products are not comprised of a single color, but rather contain blended colors for a more natural appearance. This means that there will be significant color variance from stone to stone, so purchasers should view multiple units together to get a more accurate impression of the overall color.

Note: Unilock Natural Stone variations are outside the control of Unilock.

Purchasers of natural stone must be willing to accept this inherent variability.

2. Pre-installation checking

Always check the label to ensure that the Unilock product delivered to your project is the product and color ordered. If there is a discrepancy, or if the product inside the packaging doesn't appear to be correct, contact your hardscape dealer before installing any pavers or wall units. If the product is installed, it indicates your acceptance of the products as delivered.

3. Blending

If the project requires more than one bundle of product it's always a good idea to draw product from several bundles when installing, as this ensures that any variation between bundles will be seamlessly integrated in the project. When bundles are from different production runs, random selection from multiple bundles is even more important.

4. Efflorescence

Efflorescence is a naturally occurring process that may appear as a white or light grey powder on the surface of concrete, clay or natural stone. It is temporary, and will disappear over time. However, if it is bothersome, an efflorescence cleaner can be used to remove it. There is no way to predict or prevent efflorescence. Because it does not compromise the structural integrity of the product, it is not covered by Unilock product warranties.

INSTALLATION ADVISORY

1. Construction Residue

While a certain amount of dirt on pavers and walls is inevitable during the construction phase, installers are strongly encouraged to clean as they go as construction residue can embed in the surface and become difficult to remove. The slurry produced

during wet-saw cutting is particularly stubborn to clean if allowed to dry on the surface of pavers. Unilock warranties do not cover stains caused by a failure to remove construction residue.

2. Polymeric Haze

Surface hazing caused by polymeric jointing sand is not the responsibility of Unilock. Polymeric jointing sand should only be installed by an experienced and knowledgeable contractor. Any sand that is left on the surface prior to activation will result in a haze that is very difficult and time-consuming to remove. Only the highest quality, brand name polymeric sand that is guaranteed by the manufacturer should be used.

3. Compaction Damage

Both smooth and textured paver surfaces can be scratched by compaction equipment used to 'flatten' a new paver installation. Therefore, metal plate compactors must be fitted with a polyethylene mat to protect the paver surface from becoming scratched, or a superior option is to use a rubber-roller compactor instead. Damage to product surfaces caused by failure to follow these instructions is not covered by Unilock product warranties.

FIRE PIT WARNING


Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.

THE IMPORTANCE OF ASPECT RATIO


Simply defined, aspect ratio is the overall length of a paver divided by its height.

$\text{LENGTH/HEIGHT} = \text{ASPECT RATIO}$


If an insufficient aspect ratio is used, any flexing or rocking caused by movement on the surface such as vehicular traffic, could result in breakage of the paver units. Not only is this breakage unsightly, but it can also compromise the integrity of the segmental system.



OVER 5 : 1
Pedestrian Only




4 : 1
Light-Duty
Vehicular



3 : 1 OR LESS
Heavy-Duty
Vehicular

LAYING PATTERN CONSIDERATIONS


The laying pattern used in your application can also add a significant amount of strength to your design. A herringbone pattern provides the best 'lock-up', adding strength against rotational forces such as tires at a roadway intersection in the same way the 'L' shaped paver provides maximum performance.

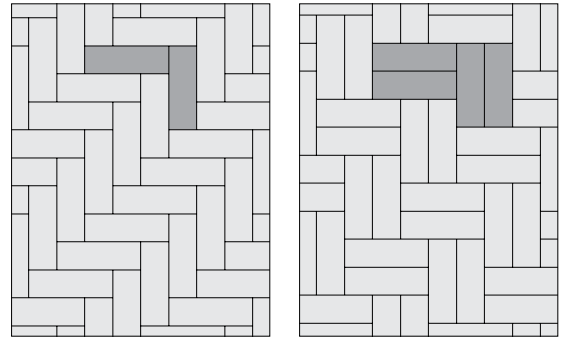

HEAVY-DUTY CONSIDERATIONS

Unilock has a variety of shapes and sizes available to fit your heavy-duty application and style preferences. For maximum performance where twisting and tipping will be factors, consider the unique "L" interlocking shape as it provides superior resistance under heavy loads. The patented locking features work in tandem with the "tri-axis" technology. The result? A stronger, more stable pavement surface.

Heavy-duty Unilock paving systems are also designed for rapid mechanized installation, making them competitive and affordable.

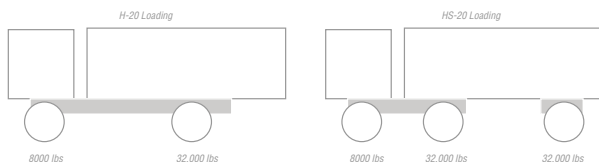

H-20 & HS-20 LOAD RATING

Similar to top of deck stresses per AASHTO H-20 loading conditions (32,000 lbs/14,500 kg), Unilock pavers can support 3-4 axle vehicles. This would include delivery, fire and semi-truck and trailer traffic in light-duty roadway applications.

SPEAK WITH YOUR UNILOCK REPRESENTATIVE FOR MORE INFORMATION.

FINISHES



Umbriano®
Mottled Finish with
ColorFusion™ and EasyClean



Series™
Exposed Granite Finish



Il Campo®
Brushed Finish



Smooth
Premier Finish



Flagstone
Premier Finish



Antiqued
Timeworn Finish



Classic
Thrumix Finish

COLOR BLEND DESCRIPTIONS

COLOR NAME	DESCRIPTION
Avorio	Beige and White
Basalt	Blueish-Black
Bavarian	Brown, Cream and Charcoal
Beechwood	Tan and Charcoal
Birch	Dark Brown, Light Brown and Cream
Black Granite	Black Granite and Charcoal
Burgundy Red	Plum with Red
Burnt Clay	Brown with Red
Chamois	Medium Buff
Charleston	Plum, Charcoal and Sand
Cocoa Brown	Solid Dark Brown
Cobalt Grey	White, Grey and Blue hues
Coffee Creek	Sandstone, Brown and Charcoal
Corvara	Light Grey/Beige
Dark Charcoal	Dark Charcoal
Dawn Mist	Grey and Tan
Fossil	Light & Dark Grey, Chamois and White Accents
French Grey	Light Grey with White Flake
Granite	Natural and Charcoal
Golden Tan	Dark Brown, Light Brown with White Granite
Limestone	Light Gray and Charcoal
Mahogany Ash	Mid Brown and Light Charcoal
Midnight Charcoal	Charcoal and Black

COLOR NAME	DESCRIPTION
Midnight Sky	Charcoal and Black Flake
Mineral Ice Grey	Grey and White
Modena	White Concrete with Black Flecks
Natural	Light Grey and Medium Grey
Notte	Mid Charcoal, White and Light Natural
Old Oak	Rust with Red
Onyx Black	Dark Charcoal with Black Granite
Opal	Light Grey and White
Pebble Taupe	Tan with Light Brown
Peppered Granite	White aggregates with black flecks
River	Buff, Natural and Charcoal
Rustic Red	Red and Charcoal
Sabia	Brown, Black and Light Natural
Sable Blend	Cream Tan Brown
Sandstone	Buff and Tan
Sierra	Charcoal, Russet and Buff
St. Clair	Salmon and Brown
Steel Grey	Dark Charcoal & Grey
Steel Mountain	Natural and Charcoal
Summer Wheat	Cream White with Pale Yellow & Beige Particles
Terra Cotta	Salmon and Charcoal
Vivanto	Dark Grey and Charcoal
Winter Marvel	White and Black Flake

MICHIGAN PRODUCT DIRECTORY

UNIT PAVERS

Product	Page	Finish	Pedestrian	Residential Vehicular	Commercial Vehicular	Environmental	For Borders & Accents
Anchorlock™	4				✓		
Arcana™	5	S	✓				
Artline™	6	S	✓				
Beacon Hill™ Flagstone	7	F	✓				
Beacon Hill™ Smooth	8-9	SM	✓				
Boulevard™	10	F	✓				
Bristol Valley®	11	S	✓				
Brussels Block®	12	W	✓	✓			✓
Copthorne®	13	T	✓	✓			✓
Courtstone®	14	C	✓	✓			✓
Eco-Optiloc™	15	S	✓	✓	✓	✓	
Eco-Priora™	16	B	✓	✓	✓	✓	
Eco-Promenade®	17	S	✓	✓	✓	✓	
Granito™ Random	18	S	✓				
Granito™ Hex	18	S	✓	✓			
Hex™ Paver	19	S	✓	✓			
Hollandstone™	20	S	✓	✓	✓		✓
Holland Premier®	21	S	✓	✓	✓		✓
Il Campo®	22	B	✓	✓	✓		✓
Mattoni™	23	T	✓	✓	✓		✓
Natural Stone	24-25	SM	✓				
Porcelain	26	SM	✓				
Promenade® Paver	27-30	S	✓	✓	✓		✓
Richcliff®	31	F	✓	✓			✓
Series™	32	WS	✓	✓	✓		✓
Skyline™	33	S	✓				
Soreno™ NEW	34	S	✓				
Thornbury™	35	F	✓	✓		✓	
Town Hall®	36	T	✓	✓	✓	✓	✓
Treo™ Smooth NEW	37	SM	✓			✓	
Tribeca Cobble™	38	C	✓	✓			✓
Turfstone™	39	S		✓		✓	
Umbriano® - 70MM	40-41	SZ	✓	✓	✓		✓
Westport™	42	F	✓	✓			✓

RETAINING WALLS

Product	Page	Finish	Gardens	Retaining Walls	Steps	Seatwalls	Pillars
Brussels Dimensional System™	43	W	✓	✓	✓	✓	✓
DuraHold®	44	S		✓			
DuraHold2®	46	S		✓			
Estate Wall™	47	SP/W	✓	✓	✓	✓	✓
Lineo™ Dimensional Stone	48	SZ	✓	✓		✓	✓
Pisa™	49	SP	✓	✓	✓		✓
Pisa™ Smooth XL NEW	50	SM	✓	✓	✓		✓
SienaEdge®	51	SM	✓	✓	✓	✓	
SienaStone®	52	SP		✓	✓		
SienaStone® Smooth	53-54	SM		✓	✓		
U-Cara®	55-62		✓	✓		✓	✓

Finishes: B=Brushed; C=Cobblestone; D=Dimpled; DW=Dimpled and Weathered; F=Flagstone; S=Standard; SM=Smooth; SZ=Smooth Zero Bevel; SP=Split; SP/W=Split and Weathered; T=Timeworn; W=Weathered; WS=Washed

This application chart should only be used as a guide. Site conditions, base materials, pattern and frequency of use may vary the performance of various types and styles of products.

Notes




A series of horizontal lines for writing notes, consisting of 20 evenly spaced, light gray lines that fill the majority of the page area below the header.

Notes



THE MOST COMPLETE HARDSCAPE WALL SYSTEM



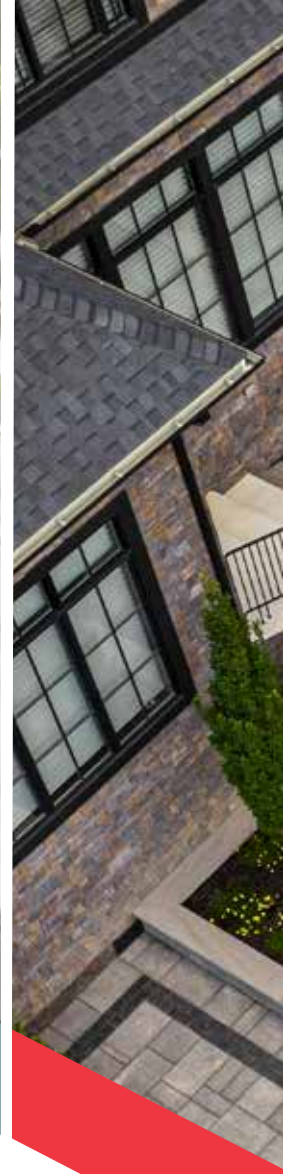

Let's **BUILD YOUR BUSINESS** **together.**

**CONTACT 1-800-UNILOCK OR VISIT UNILOCK.COM TO
CONNECT WITH YOUR LOCAL TERRITORY MANAGER**

BOSTON
(508) 278-4536

CHICAGO
(630) 892-9191

MILWAUKEE
(262) 742-3890

KANSAS
(913) 417-7985

MICHIGAN
(248) 437-7037

NEW YORK
(845) 278-6700

MID-ATLANTIC
(202) 798-2060

ONTARIO
(416) 646-9000

CINCINNATI/KY/TN
(513) 202-0219

**OHIO/WESTERN PA/
WNY&CNY**
(330) 927-4000

UNILOCK.COM | 1-800-UNILOCK

©2023 Hengestone Holdings, Inc.