



Pisa Smooth™

Wall & Coping


1-800-UNILOCK | UNILOCK.COM

UNILOCK
PAVERS & WALLS

PISA SMOOTH™ CLASSIC



CLIFFSIDE GREY

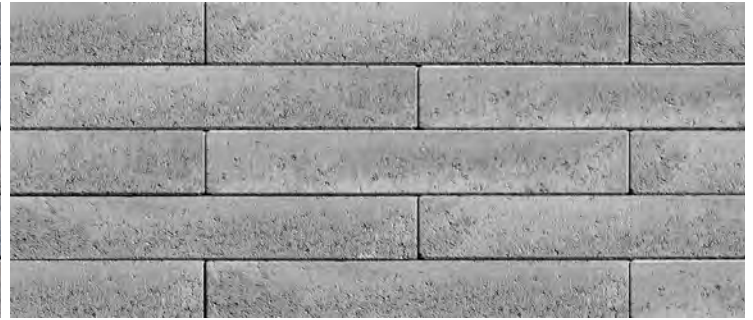

GRANITE BLEND



IRISH COAST



SANDY BEACH

PRODUCT ATTRIBUTES

Visual Appearance	A sleek, linear aesthetic with clean lines and subtle edge details that blend well with both modern and traditional design.
Finish	Smooth, linear appearance.

PRODUCT SPECIFICATIONS



STANDARD
10¾ x 21½ x 3⅜"
275 x 550 x 85mm




COPING
13¾ x 21½ x 3⅜"
350 x 550 x 85mm

See Steps, Treads & Coping section page 150 for more details




CORNER
10¾ x 21½ x 3⅜"
275 x 550 x 85mm



U-GRIP™ BASE PAD
14 x 19 x 2"
355 x 482 x 55mm

GEOGRID WALL SECTION

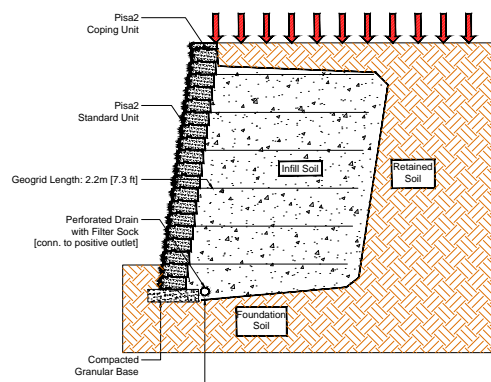

Cross sections are examples, and must not be used for construction.

RECOMMENDED ADHESIVE




Gator Block Bond XP

- | VOC Compliant
- | Low odor- safe indoors or out
- | Fast curing- provides permanent overnight bond
- | Suitable for use in hot and cold environments
- | Non-shrinking- does not crack
- | Strong and versatile
- | Coverage: For 1/4" Bead (approx)

10 oz		28 oz	
m	ft.	m	ft.
-9	-31	-26	-86

GRAVITY WALL SECTION

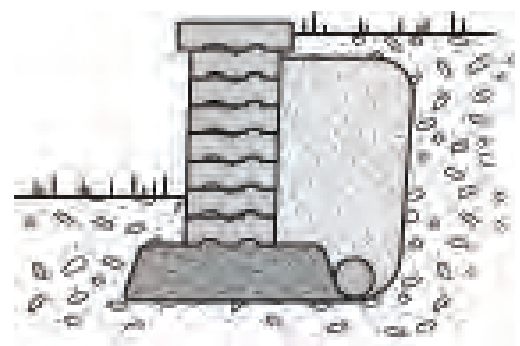

TECHNICAL INFORMATION

ASTM C 1372 Standard Specifications for Dry-Cast Segmental Retaining Wall Units

Conforms to:

- C140 for Absorption and Compressive Strength > 3000 PSI
- C1262 for Freeze Thaw Durability <1% mass loss
- C1372 Overall dimensional variations permissible for width, height and length +/- 1/8" (+/-3 mm)

Unilock standards exceed 5,000 PSI for Pisa® Smooth products with:

- 4% absorption avg.
- 5% absorption max.
- Dimensional Accuracy +/- 1/8" (+/-3 mm)

Test results available upon request

Meets the U.S. Architectural & Transportation Barrier Compliance Board Slip-Resistance Surfaces Advisory Guidelines

LEED INFORMATION

Materials & Resources: LEED V4:

Building Product Disclosure and Optimization

Sourcing of Raw Materials - Sourcing of Raw Materials and Extraction • 1 point

Sourcing of Raw Materials - Leadership Extraction Practices • 1 point

Material Ingredient Reporting - Material Ingredient Reporting • 1 point

Material Ingredient Reporting - Material Ingredient Optimization • 1 point

Environmental Product Declaration • 1 point

If required, summary test data shall be provided with the SRW Design and shall include:

a) SRW Unit shear strength as per ASTM D6916

b) SRW Unit - Geosynthetic Reinforcement connection strength as per ASTM D6638

PRODUCT DATA

Stones & Bundling	Face Feet Per		Linear Feet Per		Units Per		Per Bundle		Lbs Per	
	Bundle	Unit	Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
Gormley Manufacturing; U-Grip - Gormley Manufacturing										
Standard	24.18	0.503	86.61	-	48	-	6	1	48.14	2,311
Corner Unit	24.18	0.503	129.92	-	48	-	6	1	60	2,880
Coping Unit	18.12	0.503	64.96	-	36	-	6	1	76.74	2,763
U-Grip Base Pad			85.39	1.581	54		9		46	2,500

Notes: Sold in full bundles only. Maximum height - 36" (under optimum conditions) but can be engineered for walls that require to be higher. Higher walls can be achieved using geogrid reinforcement. Automatic setback is 3/4" per row. Engineering services are available. Contact your Unilock Territory Manager or call 1-800-UNILOCK for further information. *For custom options, please contact your Unilock Territory Manager.

APPLICATIONS



Garden Walls & Seat Walls



Retaining Walls



Steps

For coping options, we recommend using Ledgestone™, Natural Stone, Universal Coping or Pisa Coping.

*Things to know:


Handling and Installation - Product is installed using Unilock Concrete Adhesive to secure corners and all rows. Base preparation may vary according to soil and climate conditions. Maximum height is 24" including the unit in the ground (under optimum conditions). Based on 12" deep wall coverage = 21.4 sqft per bundle. Based on an 8" deep wall coverage = 32 sqft per bundle.

PISA SMOOTH™ COPING

CLASSIC



CLIFFSIDE GREY

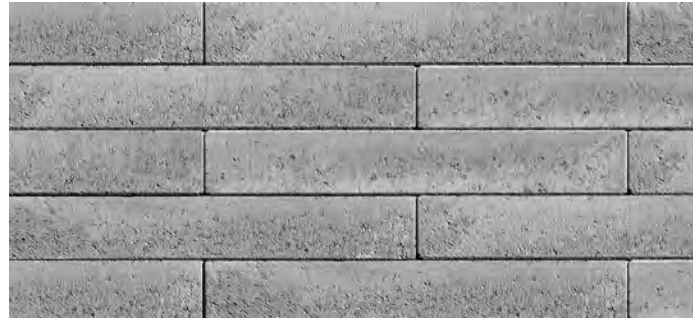

GRANITE BLEND



IRISH COAST



SANDY BEACH

PRODUCT ATTRIBUTES

Visual Appearance	A sleek, linear aesthetic with clean lines and subtle edge details that blend well with both modern and traditional design.
Finish	Smooth, linear appearance.

PRODUCT SPECIFICATIONS



COPING

13¾ x 21½ x 3⅝"
350 x 550 x 85mm

PRODUCT DATA

Stones & Bundling	Face Feet Per		Linear Feet Per		Units Per		Per Bundle		Lbs Per	
	Bundle	Unit	Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
Gormley Manufacturing; U-Grip - Gormley Manufacturing										
Coping Unit	18.12	0.503	64.96	-	36	-	6	1	76.74	2,763

Notes: Sold in full bundles or sections only. Contact your Unilock Territory Manager or call 1-800-UNILOCK for further information.

*For custom options, please contact your Unilock Territory Manager.

RECOMMENDED ADHESIVE



Gator Block Bond XP

- | VOC Compliant
- | Low odor- safe indoors or out
- | Fast curing- provides permanent overnight bond
- | Suitable for use in hot and cold environments
- | Non-shrinking- does not crack
- | Strong and versatile
- | **Coverage: For 1/4" Bead (approx)**

10 oz		28 oz	
m	ft.	m	ft.
-9	-31	-26	-86

*Things to know:

Handling and Installation - care must be taken to avoid tossing stones so that they bang against each other. Damage to the surface appearance can happen if handled too rough.